

Low Voltage

# EasyPact CVS

Moulded-case circuit breakers and switch-disconnectors  
from 100 to 630 A

Catalogue  
2012



**Schneider**  
 **Electric**

> Safe

> Reliable

> Simple

# The easy choice for quality and value

## EasyPact CVS

LV circuit breakers from 100 to 630A



Schneider  
 Electric

- > Do you strain to find a high quality circuit breaker that is simple, flexible, and safe?
- > Have tight project budgets restricted you from choosing the best quality products?
- > Do you need the reach, support and accessibility of a global leader, with the value of a local supplier?



Buildings



Industry

**Gain peace of mind  
and optimized cost  
for every installation**





---

Presentation

1

---

Functions  
and characteristics

A-1

---

Installation  
recommendations

B-1

---

Dimensions  
and connection

C-1

---

Additional characteristics


D-1

---

Catalogue numbers

E-1

# Functions and characteristics



**Introduction**

General characteristics	A-2
Characteristics and performance	A-4

**Protection of distribution systems**

TM-D thermal-magnetic trip units	A-6
ETS 2.3 electronic trip unit and accessories	A-7

**Earth-leakage protection**

A-8

**Motor protection**

MA instantaneous trip units	A-9
-----------------------------	-----

**Switch-disconnectors**

A-10

**Accessories and auxiliaries**

Overview	A-12
Device installation	A-13
Connection of devices	A-14
Selection of auxiliaries	A-16
Indication contacts	A-17
Remote tripping	A-18
Rotary handles	A-19
Locks and sealing accessories	A-20
Escutcheons and protection collars	A-21

*Installation recommendations*

B-1

*Dimensions and connection*

C-1


*Additional characteristics*

D-1


*Catalogue numbers*

E-1

DB400000

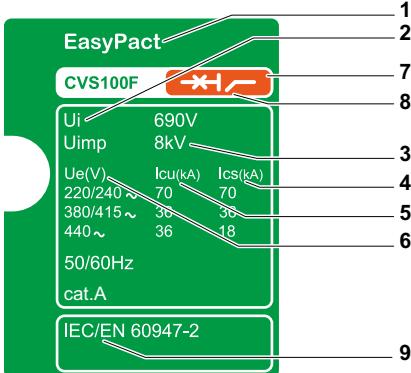

- Standardised characteristics indicated on the rating plate:*
- 1 Type of device: frame size and breaking capacity class
  - 2  $Ui$ : rated insulation voltage.
  - 3  $U_{imp}$ : rated impulse withstand voltage.
  - 4  $I_{cs}$ : service breaking capacity.
  - 5  $I_{cu}$ : ultimate breaking capacity for various values of the rated operational voltage  $U_e$
  - 6  $U_e$ : operational voltage.
  - 7 Colour label indicating the breaking capacity class.

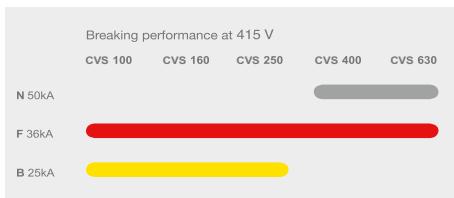

- 8 Suitable for Isolation symbol.

- 9 Reference standard.

**Note:** when the circuit breaker is equipped with an extended rotary handle, the door must be opened to access the rating plate.

## Compliance with standards

EasyPact CVS circuit breakers and auxiliaries comply with the following international recommendations:

- IEC 60947-1: general rules
- IEC 60947-2: circuit breakers
- IEC 60947-3: switch-disconnectors

## Pollution degree

EasyPact CVS circuit breakers are certified for operation in pollution-degree III environments as defined by IEC standards 60947-1 and 60664-1 (industrial environments).

## Climatic withstand

EasyPact CVS circuit breakers have successfully passed the tests defined by the following standards for extreme atmospheric conditions:

- IEC 60068-2-1: dry cold (-55°C)
- IEC 60068-2-2: dry heat (+85°C)
- IEC 60068-2-30: damp heat (95 % relative humidity at 55°C)
- IEC 60068-2-52 severity level 2: salt mist.

## Environment

EasyPact CVS respects the European environment directive EC/2002/95 concerning the restriction of hazardous substances (RoHS).

All EasyPact CVS production sites have set up an ISO 14001 certified environmental management system.

## Ambient temperature

- EasyPact CVS circuit breakers can be used between -25°C and +70°C. For temperatures higher than 40°C (65°C for circuit breakers used to protect motor feeders), devices must be derated ([see page B-2](#)).
- Circuit breakers should be put into service under normal ambient, operating-temperature conditions. Exceptionally, the circuit breaker can be put into service when the ambient temperature is between -35°C and -25°C.
- The permissible storage-temperature range for EasyPact CVS circuit breakers in the original packing is -50°C and +85°C.

---

## **Suitable for isolation with positive contact indication**

All EasyPact CVS circuit breakers are suitable for isolation as defined in IEC standard 60947-2:

- The isolation position corresponds to the O (OFF) position.
  - The operating handle cannot indicate the OFF position unless the contacts are effectively open.
  - Padlocks cannot be installed unless the contacts are open.  
Installation of a rotary handle does not alter the reliability of the position-indication system.
- The isolation function is certified by tests guaranteeing:
- The mechanical reliability of the position-indication system
  - The absence of leakage currents
  - Over voltage withstand capacity between upstream and downstream connections.
- The tripped position does not ensure isolation with positive contact indication.  
Only the OFF position guarantees isolation.

## **Installation in class II switchboards**

All EasyPact CVS circuit breakers are class II front face devices. They can be installed through the door of class II switchboards (as per IEC standards 61140 and 60664-1) without downgrading switchboard insulation. Installation requires no special operations, even when the circuit breaker is equipped with a rotary handle.

## **Degree of protection**

The following indications are in accordance with standards IEC 60529 (IP degree of protection) and IEC 62262 (IK protection against external mechanical impacts).

### **Bare circuit breaker:**

- with toggle: IP40, IK07 front face
- with extended rotary handle: IP 55, IK08

### **Circuit breaker installed in a switchboard:**

- with toggle: IP40, IK07 front face
- with extended rotary handle: IP 55, IK08

PB106447



EasyPact CVS100/160/250

PB106448



EasyPact CVS400/630

### Common characteristics

#### Rated voltages

Insulation voltage (V)	Ui	690
------------------------	----	-----

Impulse withstand voltage (kV)	Uimp	8
--------------------------------	------	---

Operational voltage (V)	Ue	AC 50/60 Hz	440
-------------------------	----	-------------	-----

Suitability for isolation	IEC/EN 60947-2			yes
---------------------------	----------------	--	--	-----

Utilisation category				A
----------------------	--	--	--	---

Pollution degree	IEC 60664-1			3
------------------	-------------	--	--	---

### Circuit breakers

#### Performance

#### Electrical characteristics as per IEC 60947-2

Rated current (A)	In	40 °C
-------------------	----	-------

#### Number of poles

#### Breaking capacity levels

##### Breaking capacity (kA rms)

Icu	AC 50/60 Hz	220/240 V
		380/415 V
		440 V

##### Service breaking capacity (kA rms)

Ics	AC 50/60 Hz	220/240 V
		380/415 V
		440 V

#### Durability (C-O cycles)

Mechanical	
Electrical	415V
	In/2

### Protection

Short-circuit protection	Magnetic only
--------------------------	---------------

Overload/short-circuit protection	Thermal magnetic
-----------------------------------	------------------

Electronic
------------

with neutral protection (Off-0.5-1)
-------------------------------------

Earth-leakage protection	By Vigi module
--------------------------	----------------

### Installation/connections

#### Dimensions and weights

Dimensions (mm) W x H x D	Fixed, front connections	3P 4P
------------------------------	--------------------------	----------

Weight (kg)	Fixed, front connections	3P 4P
-------------	--------------------------	----------

### Connections


Connection terminals	Pitch	Without/With spreaders
----------------------	-------	------------------------

Large Cu or Al cables	Cross-section	mm <sup>2</sup>
-----------------------	---------------	-----------------

<b>CVS100</b>	<b>CVS160</b>	<b>CVS250</b>	<b>CVS400</b>	<b>CVS630</b>
<b>100</b>	<b>160</b>	<b>250</b>	<b>400</b>	<b>630</b>
3, 4	3, 4	3, 4	3, 4	3, 4
<b>B F</b>	<b>B F</b>	<b>B F</b>	<b>F N</b>	<b>F N</b>
40 70	40 70	40 70	40 70	40 70
25 36	25 36	25 36	36 50	36 50
20 36	20 36	20 36	30 42	30 42
40 70	40 70	40 70	40 70	40 70
25 36	25 36	25 36	36 50	36 50
15 18	15 18	15 18	23 32	23 32
30000	25000	20000	15000	15000
30000	25000	20000	12000	8000
12000	12000	10000	6000	4000
■	■	■	■	■
■	■	■	■	■
-	-	-	■	■
-	-	■	■	■
■	■	■	■	■
105 x 161 x 86	105 x 161 x 86	105 x 161 x 86	140 x 255 x 110	140 x 255 x 110
140 x 161 x 86	140 x 161 x 86	140 x 161 x 86	185 x 255 x 110	185 x 255 x 110
1.8	1.8	2.0	4.7	5.2
2.2	2.3	2.6	6.3	7.1
35/45 mm	35/45 mm	35/45 mm	45/52.5 mm 45/70 mm	45/52.5 mm 45/70 mm
300	300	300	4 x 240	4 x 240

TM-D thermal-magnetic trip units can be used on EasyPact CVS100-630 circuit breakers with performance levels B/F/N.

### TM-D thermal-magnetic trip units

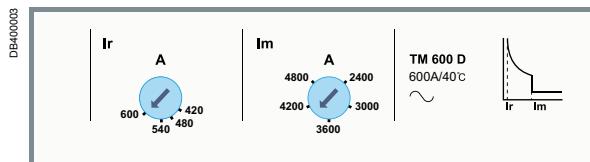

### Protection



TM-D trip units are used mainly in electrical distribution applications for protection of cables supplied by transformers.

#### Thermal protection ( $I_r$ )

Thermal protection operates according to:

- $I_r$  that can be adjusted in amps from 0.7 to 1 times the rating of the trip unit (16 A to 250 A), corresponding to settings from 11 to 250 A for the range of trip units
- a non-adjustable time delay.

#### Magnetic protection ( $I_m$ )

Short-circuit protection with a fixed or adjustable pick-up  $I_m$  that initiates instantaneous tripping if exceeded.

- TM-D: fixed pick-up,  $I_m$ , for 16 to 250 A ratings and adjustable from 5 to 10 x  $I_n$  for 400 A ratings, 4.2 to 8.3 x  $I_n$  for 600 A rating.

#### Protection versions

- 3-pole:
- 3P 3D: 3-pole frame (3P) with detection on all 3 poles (3D)
- 4-pole:
- 4P 3D: 4-pole frame (4P) with detection on 3 poles (3D).
- 4P 4D: 4-pole frame (4P) with detection on all 4 poles (same threshold for phases and neutral).

Thermal-magnetic trip units		TM16D to 250D										TM320D to 600D					
Ratings (A)	$I_n$ at 40 °C <sup>(1)</sup>	16	25	32	40	50	63	80	100	125	160	200	250	320	400	500	600
Circuit breaker	CVS100	■	■	■	■	■	■	■	■	-	-	-	-	-	-	-	-
	CVS160	-	-	-	-	-	-	-	■	■	■	■	■	-	-	-	-
	CVS250	-	-	-	-	-	-	-	-	-	■	■	■	-	-	-	-
	CVS400	-	-	-	-	-	-	-	-	■	■	■	■	■	-	-	-
	CVS630	-	-	-	-	-	-	-	-	-	-	■	■	-	-	-	-
<b>Magnetic protection</b>																	
Pick-up (A)	$I_m$	fixed										adjustable					
accuracy ±20 %	CVS100	190 300 400 500 500 500 640 800															
	CVS160/250	800 1250 1250 2000 2500										1600 to 3200 (320A), 2000 to 4000 (400A)					
	CVS400											2500 to 5000					
<b>Thermal protection</b>																	
Pick-up (A) tripping between 1.05 and 1.30 $I_r$	$I_r = I_n \times \dots$	adjustable in amps from 0.7 to 1 x $I_n$															
<b>Neutral protection</b>																	
Unprotected neutral	4P 3D	no detection															
Fully protected neutral	4P 4D	1 x $I_r$															


<sup>(1)</sup> For temperatures not equal to 40°C, the thermal protection characteristics are modified. See the temperature derating table on page B-2.

**Note:** All the trip units have a transparent lead-sealable cover that protects access to the adjustment dials.

# Protection of distribution systems

## ETS 2.3 electronic trip unit and accessories

### ETS 2.3 electronic trip unit

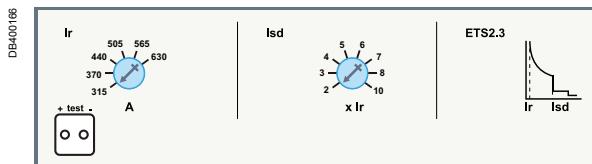

#### Protection

The protection functions can be set using the adjustment dials.

#### Overload protection

Long-time protection with an adjustable threshold and fixed tripping delay:  
 ■ Ir base setting (6-position dial from 0.5 to 1)

#### Short-circuit protection

Short-time and instantaneous protection:

- short-time protection with an adjustable pick-up and fixed tripping delay
- instantaneous protection with fixed pick-up.

#### Protection of the fourth pole

On 4-pole circuit breakers, neutral protection is set using a three-position switch to 4P 3D (neutral unprotected), 4P 3D + N/2 (neutral protection at 0.5 In) or 4P 4D (neutral protection at In).

Trip units	ETS 2.3
Ratings (A) of circuit breaker	In 20 to 70 °C
Circuit breaker	CVS400 F/N CVS630 F/N
	■ - - ■
<b>Overload protection (Long time)</b>	
Current setting	Ir = In x ...
	0.5...1 adj., 6 settings
Time delay (s) (min....max.)	fixed at 1.5 x Ir at 6 x Ir at 7.2 Ir
	90...180 5...7.5 3.2...5.0
<b>Short-circuit protection (Short time)</b>	
Pick-up (A) accuracy $\pm$ 15 %	Isd = Ir x ...
	2...10 adj., 8 settings
Time delay (ms)	fixed max. resettable time max. break time
	$\leq 40$ $\leq 60$
<b>Short-circuit protection (instantaneous)</b>	
Pick-up (A)	II = In x ...
	11
<b>Protection of the fourth pole</b>	
Neutral unprotected	4P 3D
Neutral protection at 0.5 In	4P 3D + N/2
Neutral protection at In	4P 4D
<b>Thermal memory</b>	
CVS400 F/N	Yes
CVS630 F/N	Yes

### Test equipment for ETS electronic trip unit

#### Mini test kit

The mini test kit is a portable unit requiring no external power supply, used to check operation of the electronic trip unit and circuit breaker tripping.  
 It connects to the test connector on the front of the circuit breaker.  
 Required power source: five 9 V alkaline batteries (not supplied).

#### Portable test kit

The portable test kit is used to check all aspects of the protection functions:

- long time protection
- short time protection
- instantaneous protection
- earth-fault protection.

Required power source: 110 or 220 V AC, 50/60 Hz.

#### Spare test plug and wiring kit

A spare test plug and wiring kit are available for this offer.

A Vigi module can be added to any three or four-pole CVS100 to 630 circuit breaker to form a Vigi CVS.

PB108449




Vigi CVS100 to 630

PB103590-36



DB112147

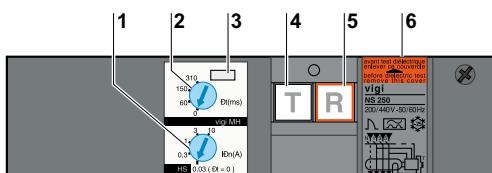

- 1 Sensitivity setting
- 2 Time-delay setting (for selective earth-leakage protection).
- 3 Lead-seal fixture for controlled access to settings.
- 4 Test button simulating an earth-fault for regular checks on the tripping function
- 5 Reset button (reset required after earth-fault tripping).
- 6 Rating plate

## Circuit breaker with add-on Vigi module (Vigi CVS)

- For general characteristics of circuit breakers, see pages A-2 and A-3.
- Add-on Vigi modules: Earth-leakage protection is achieved by installing a Vigi module (characteristics and selection criteria on next page) directly on the circuit breaker terminals. It directly actuates the trip unit (magnetic, thermal-magnetic or ETS).

## Vigi CVS100 to 630 circuit breakers with earth-leakage protection

Addition of the Vigi module does not alter circuit-breaker characteristics:

- compliance with standards
- degree of protection, class II front-face insulation
- positive contact indication
- electrical characteristics
- trip-unit characteristics
- installation and connection modes
- indication, measurement and control auxiliaries
- installation and connection accessories.

Dimensions and weights	CVS100/160/250	CVS400/630
Dimensions 3-pole	105 x 236 x 86	140 x 355 x 110
W x H x D (mm) 4-pole	140 x 236 x 86	185 x 355 x 110
Weight (kg) 3-pole	2.5	8.8
4-pole	3.2	10.8

## Vigi earth-leakage protection modules

### Compliance with standards

- IEC 60947-2, annex B.
- Decree dated 14 November 1988 (for France).
- IEC 60755, class A, immunity to DC components up to 6 mA
- operation down to -25 °C as per VDE 664.

## Vigi module selection

Type	Vigi MH	Vigi MB
Number of poles	3, 4 <sup>(1)</sup>	3, 4 <sup>(1)</sup>
CVS100	■	-
CVS160	■	-
CVS250	■	-
CVS400	-	■
CVS630	-	■

Protection characteristics		
Sensitivity	adjustable	adjustable
$I_{\Delta n}$ (A)	0.03 - 0.3 - 1 - 3 - 10	0.3 - 1 - 3 - 10 - 30
Time delay	adjustable	adjustable
Intentional delay (ms)	0 - 60 <sup>(2)</sup> - 150 <sup>(2)</sup> - 310 <sup>(2)</sup>	0 - 60 - 150 - 310
Max. break time (ms)	< 40 < 140 < 300 < 800	< 40 < 140 < 300 < 800
Rated voltage V AC 50/60 Hz	200...440	200...440

<sup>(1)</sup> Vigi 3P modules may also be used on 3P circuit breakers used for two-phase protection.  
<sup>(2)</sup> If the sensitivity is set to 30 mA, there is no time delay, whatever the time-delay setting.


## Operating safety

The Vigi module is a user safety device. It must be tested at regular intervals (every 6 months) via the test button.

# Motor protection

## MA instantaneous trip units

### MA magnetic trip units for EasyPact CVS100-630A

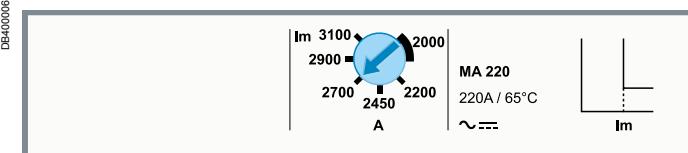

Circuit breakers with an MA trip unit are combined with a thermal relay and a contactor or a starter.

#### Protection



##### Magnetic protection (Im)

Short-circuit protection with an adjustable pick-up  $I_m$  that initiates instantaneous tripping if exceeded.

- $I_m = I_n \times \dots$  is set on an adjustment dial in multiples of the rating:

- 6 to 14 x  $I_n$  (2.5 to 100 A ratings)
- 9 to 14 x  $I_n$  (150 to 220 A ratings)
- 6 to 13 x  $I_n$  (320 to 500 A ratings)


##### Protection version

- 3-pole (3P 3D): 3-pole frame (3P) equipped with detection on all 3 poles (3D).

#### Motor protection up to 250 kW

##### Motor protection rating (kW)

CVS 100/160/250		1.1...110	
CVS 400/630			18.5...250
Breaking capacity (kA rms)	B	25	25
380/415 V	F	36	36
	N	-	-

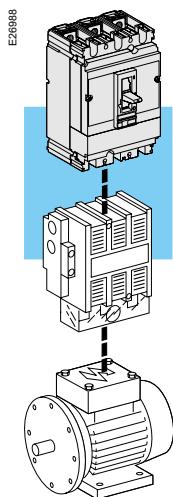

CVS100 to 630 circuit breakers, equipped with an MA magnetic trip unit with adjustable thresholds, offer:

- short-circuit protection
- suitability for isolation.

CVS100 to 630 circuit breakers with trip unit are supplied ready-assembled.

#### MA trip units

Ratings (A)	In at 65 °C	2.5	6.3	12.5	25	50	100	150	220	320	500
Circuit breaker	CVS100	■	■	■	■	■	■	-	-	-	-
	CVS160	-	-	-	-	-	■	■	-	-	-
	CVS250	-	-	-	-	-	■	■	■	-	-
	CVS400	-	-	-	-	-	-	-	-	■	-
	CVS630	-	-	-	-	-	-	-	-	-	■

#### Short-circuit protection (magnetic)

Pick-up (A)	$I_m = I_n \times \dots$	setting 6...14 x $I_n$	setting 9...14 x $I_n$	setting 6...13 x $I_n$
CVS100			-	-
CVS160/250	-		-	-
CVS400/630	-		-	-

Installation standards require upstream protection.  
However EasyPact CVS100 to 630 NA switch-disconnectors are self-protected by their high-set magnetic release.

PB108451



EasyPact CVS100 to 250 NA

PB108452



EasyPact CVS400 to 630 NA

### Switch-disconnectors

#### Electrical characteristics as per IEC 60947-3 and EN 60947-3

Conventional thermal current (A)       $I_{th}$  50 °C

Number of poles

Operational current (A) depending on $I_e$ the utilisation category	AC 50/60 Hz
	220/240 V
	380/415 V
	440 V

Short-circuit making capacity (kA peak)	$I_{cm}$	min. (switch-disconnector alone) max. (protection by upstream circuit breaker)
--	----------	--

Rated short-time withstand current (A rms)	$I_{cw}$	for	1 s
			3 s
			20 s

Durability (C-O cycles)	mechanical	415 V	In
	electrical	AC	

### Protection

Add-on earth-leakage protection      By Vigi module

### Additional indication and control auxiliaries

Indication contacts

Voltage releases	MX shunt release	
	MN undervoltage release	



### Installation/connections

Dimensions (mm)	fixed, front connections	3P
W x H x D		4P
Weight (kg)	fixed, front connections	3P
		4P


<b>CVS100NA</b>	<b>CVS160NA</b>	<b>CVS250NA</b>	<b>CVS400NA</b>	<b>CVS630NA</b>
<b>100</b>	<b>160</b>	<b>250</b>	<b>400</b>	<b>630</b>
3, 4	3, 4	3, 4	3, 4	3, 4
<b>AC22A / AC23A</b>				
100	160	250	400	630/500
100	160	250	400	630/500
100	160	250	400	630/500
2.6	3.6	4.9	7.1	8.5
75	75	75	105	105
1800	2500	3500	5000	6000
1800	2500	3500	5000	6000
690	960	1350	1930	2320
30000	25000	20000	15000	15000
<b>AC22A / AC23A</b>				
8000	8000	6500	4000	2500
■		■		
■		■		
■		■		
■		■		
105 x 161 x 86		140 x 255 x 110		
140 x 161 x 86		185 x 255 x 110		
1.5 to 1.8		5.2		
2.0 to 2.2		6.8		

**Insulation accessories ▶ E-9, E-19**

DB400001




Sealable terminal shields



Interphase barriers

**Connection ▶ A-14**

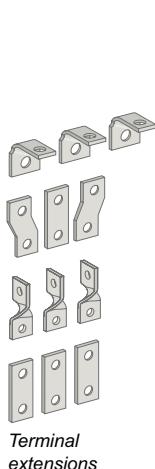

Terminal extensions



Connection



Connection



Connection



Connection



Rear connectors


**Electrical auxiliaries ▶ A-17**




Indication contact



Voltage release

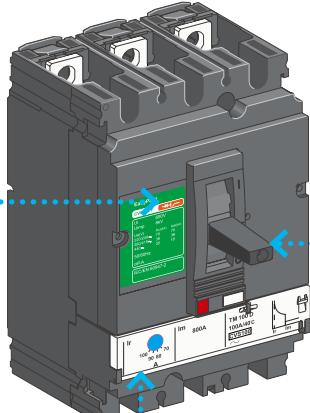


**Monitoring ▶ A-8**




Earth leakage protection  
(VigiCVS)

**Control accessories ▶ A-19**



Direct rotary handle



Extended rotary handle


# Accessories and auxiliaries

## Device installation

CVS circuit breakers may be installed horizontally, vertically or flat on their back, without derating performance levels.

### Fixed circuit breakers


Fixed circuit breakers are designed for standard connection using bars or cables with lugs. Bare-cable connectors are available for connection to bare copper or aluminium cables.

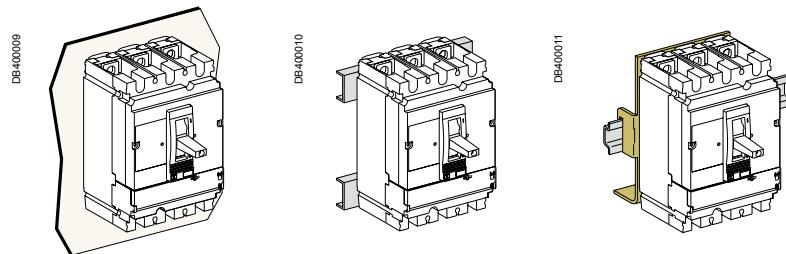

*Mounting on a backplate.*





*Mounting on rails.*

*Mounting on DIN rail (with adaptor).*

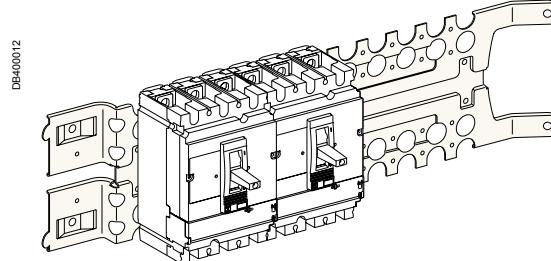

*Mounting on a Prisma mounting plate.*


Fixed circuit breakers are designed for standard front connection using bars or cables with lugs.  
Cable connectors are available for bare cables. Rear connection is also possible.



Straight terminal extensions.



Right-angle terminal extensions



Spreaders.

### Front connection

#### Bars or cables with lugs

##### Standard terminals

EasyPact CVS100 to 630 come with terminals comprising snap-in nuts with screws:

- EasyPact CVS100: M6 nuts and screws.
- EasyPact CVS160/250: M8 nuts and screws
- EasyPact CVS400/630: M10 nuts and screws.

These terminals may be used for:

- direct connection of insulated bars or cables with lugs
- terminal extensions.

Interphase barriers or terminal shields are recommended. They are mandatory for certain connection accessories (in which case the interphase barriers are provided).

##### Bars

When the switchboard configuration has not been tested, insulated bars are mandatory.

##### Maximum size of bars

EasyPact CVS circuit breaker	100/160/250	400/630
Without spreaders	pitch (mm)	35
	maximum bar size (mm)	20 x 2
With spreaders	pitch (mm)	45
	maximum bar size (mm)	32 x 2
		40 x 6

##### Crimp lugs

There are two modules of lugs, for aluminium and copper cables.

Interphase barriers or long terminal shields must be used with narrow lugs. The lugs are supplied with interphase barriers.

EasyPact CVS circuit breaker	100/160/250	400/630
Copper cables	size (mm <sup>2</sup> )	150, 185
	crimping	hexagonal barrels or punching
Aluminium cables	size (mm <sup>2</sup> )	150, 185
	crimping	hexagonal barrels

##### Terminal extensions

Extensions with anti-rotation ribs can be attached to the standard terminals to provide numerous connection possibilities in little space:

- straight terminal extensions
- right-angle terminal extensions

##### Spreaders

Spreaders may be used to increase the pitch:

- CVS100 to 250: the 35 mm pitch can be increased to 45 mm
- CVS400/630: the 45 mm pitch can be increased to 52 or 70 mm.



Bars, cable lugs or cable connectors can be attached to the ends.

##### Pitch (mm) depending on the type of spreader

EasyPact CVS circuit breaker	CVS100 to 250	CVS100 to 630
Without spreaders	35	45
With spreaders	45	52.5 or 70

# Accessories and auxiliaries

## Connection of devices

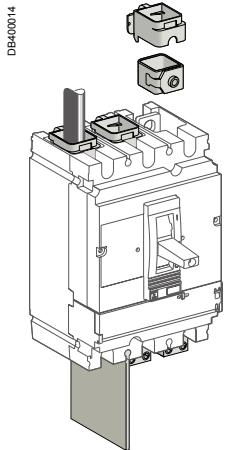

**1-cable connector for**  
CVS100 to 250   CVS400/630. **2-cable connector for**  
CVS100 to 250   CVS400/630.

### Bare cables

Bare-cable connectors may be used for both copper and aluminium cables.

#### 1-cable connectors for EasyPact CVS100 to 250

The connectors snap directly on to the device terminals or are secured by clips to right-angle and straight terminal extensions as well as spreaders.

#### 1-cable connectors for EasyPact CVS400 to 630


The connectors are screwed directly to the device terminals.

#### 2-cable connectors for EasyPact CVS100 to 250 and 400/630

The connectors are screwed to device terminals or right-angle terminal extensions.

### Maximum size of cables depending on the type of connector

EasyPact CVS circuit breaker	100/160	250	400	630
Steel connectors	1.5 to 95 mm <sup>2</sup>	■		
Aluminium connectors	25 to 95 mm <sup>2</sup>	■	■	
	120 to 185 mm <sup>2</sup>	■	■	
	2 cables 50 to 120 mm <sup>2</sup>	■	■	
	2 cables 35 to 240 mm <sup>2</sup>	■	■	
	35 to 300 mm <sup>2</sup>	■	■	

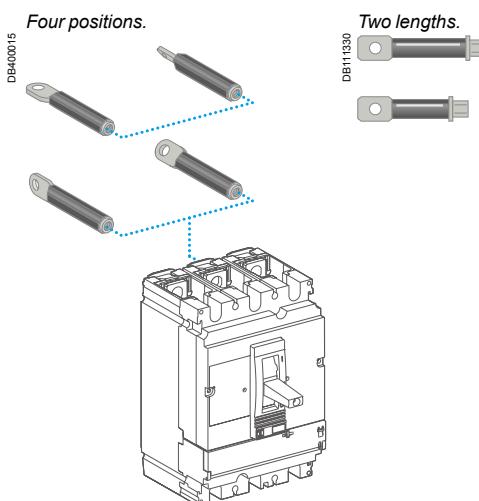

### Rear connection


Device mounting on a backplate with suitable holes enables rear connection.

### Bars or cables with lugs

Rear connections for bars or cables with lugs are available in two lengths. Bars may be positioned flat, on edge or at 45° angles depending on how the rear connections are positioned.

The rear connections are simply fitted to the device connection terminals. All combinations of rear connection lengths and positions are possible on a given device.

DB115583

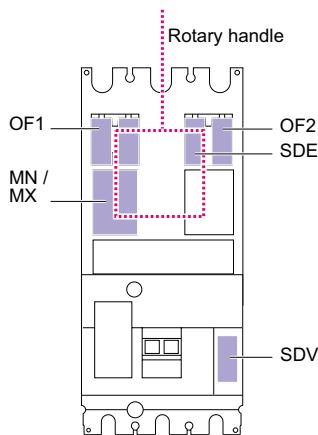

#### EasyPact CVS100/160/250

##### Standard


All EasyPact CVS100/160/250 circuit breakers and switch-disconnectors have slots for the electrical auxiliaries listed below.

##### 5 indication contacts (see page A-17)

- 2 ON/OFF (OF1 and OF2)
- 1 trip indication (SD)
- 1 fault-trip indication (SDE)
- 1 earth-fault indication (SDV), when the device is equipped with a Vigi module.
- 1 remote-tripping release (see page A-18)**
- either 1 MN undervoltage release
- or 1 MX shunt release.

All these auxiliaries can be installed with a rotary handle.

DB115590

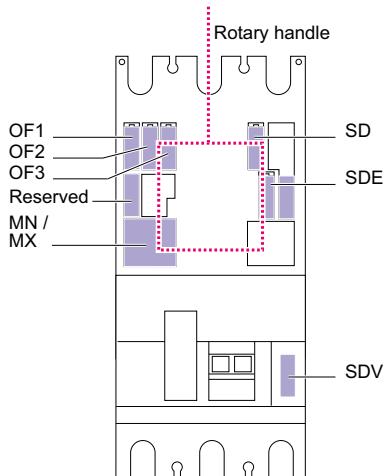

#### EasyPact CVS400/630

##### Standard

All EasyPact CVS400/630 circuit breakers and switch-disconnectors have slots for the electrical auxiliaries listed below.

##### 6 indication contacts (see page A-17)

- 3 ON/OFF (OF3)
- 1 trip indication (SD)
- 1 fault-trip indication (SDE)
- 1 earth-fault indication (SDV), when the device is equipped with a Vigi module.
- 1 remote-tripping release (see page A-18)**
- either 1 MN undervoltage release
- or 1 MX shunt release.

All these auxiliaries can be installed with a rotary handle.

The illustration shown (TMD, MA, NA and ETS 2.3 standard) indicates auxiliary possibilities depending on the type of trip unit.

# Accessories and auxiliaries

## Indication contacts

One contact model provides circuit-breaker status indications (OF - SD - SDE - SDV).

These common-point changeover contacts provide remote circuit-breaker status information.

They can be used for indications, electrical locking, relaying, etc.  
They comply with the IEC 60947-5 international recommendation.



Indication contacts.

DB125549

### Functions

#### Breaker-status indications, during normal operation or after a fault

A single type of contact provides all the different indication functions:

- OF (ON/OFF) indicates the position of the circuit breaker contacts
- SD (trip indication) indicates that the circuit breaker has tripped due to:
  - an overload
  - a short-circuit
  - an earth fault (Vigi)
  - operation of a voltage release
  - operation of the "push to trip" button
  - disconnection when the device is ON.

The SD contact returns to de-energised state when the circuit breaker is reset.

- SDE (fault-trip indication) indicates that the circuit breaker has tripped due to:
  - an overload
  - a short-circuit
  - an earth fault (Vigi)

■ SDV indicates that the circuit breaker has tripped due to an earth fault. It returns de-energised state when the Vigi module is reset.

### Installation

■ OF, SD, SDE and SDV functions: a single type of contact provides all these different indication functions, depending on where it is inserted in the device. The contacts clip into slots behind the front cover of the circuit breaker (or the Vigi module for the SDV function).

The SDE function on a CVS100 - 630 A equipped with a magnetic, thermal-magnetic or ETS2.3 trip unit requires the SDE adaptor.

### Electrical characteristics of auxiliary contacts

Contacts		Standard				Low level			
Types of contacts		All				OF, SD, SDE, SDV			
Rated thermal current (A)		6				5			
Minimum load		100 mA at 24 V DC				1 mA at 4 V DC			
Utilisation cat. (IEC 60947-5-1)		AC12	AC15	DC12	DC14	AC12	AC15	DC12	DC14
Operational current (A)	24 V AC/DC	6	6	6	1	5	3	5	1
	48 V AC/DC	6	6	2.5	0.2	5	3	2.5	0.2
	110 V AC/DC	6	5	0.6	0.05	5	2.5	0.6	0.05
	220/240 V AC	6	4	-	-	5	2	-	-
	250 V DC	-	-	0.3	0.03	5	-	0.3	0.03
	380/440 V AC	6	2	-	-	5	1.5	-	-

DB12550



MX or MN voltage release.

DB115605



Opening conditions of the MN release.

DB115606




Closing conditions of the MN release.


PB103732-32



MX release with a time-delay unit.

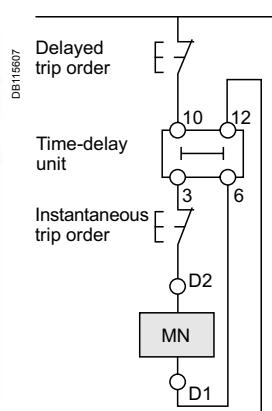

DB115608



Opening conditions of the MX release.

### MN undervoltage release

- This release trips the circuit breaker when the control voltage drops below a tripping threshold
- The tripping threshold is between 0.35 and 0.7 times the rated voltage
- Circuit breaker closing is possible only if the voltage exceeds 0.85 times the rated voltage.

#### Characteristics

Power supply	V AC	50/60 Hz: 24 - 48 - 100/130 - 200/240
	50 Hz: 380/415	60 Hz: 208/277
	V DC	12 - 24 - 30 - 48 - 60 - 125 - 250
Operating threshold	Opening	0.35 to 0.7 Un
	Closing	0.85 Un
Operating range		0.85 to 1.1 Un
Consumption (VA or W)		Pick-up: 10 - Hold: 5
Response time (ms)		50

### Time-delay unit for an MN release

A time delay unit for the MN release eliminates the risk of nuisance tripping due to a transient voltage dip lasting  $\leq 200$  ms. For shorter micro-outages, a system of capacitors provides temporary supply to the MN at  $U > 0.7$  to ensure non tripping. The correspondence between MN releases and time-delay units is shown below.

Power supply	Corresponding MN release
<b>Unit with fixed delay 200 ms</b>	
48 V AC	48 V DC
220 / 240 V AC	250 V DC
<b>Unit with adjustable delay <math>\leq 200</math> ms</b>	
48 - 60 V AC/DC	48 V DC
100 - 130 V AC/DC	125 V DC
220 - 250 V AC/DC	250 V DC

### MX shunt release

The MX release opens the circuit breaker via an impulse-type ( $\geq 20$  ms) or maintained order.

#### Opening conditions

When the MX release is supplied, it automatically opens the circuit breaker. Opening is ensured for a voltage  $U \geq 0.7 \times Un$ .

#### Characteristics

Power supply	V AC	50/60 Hz: 24 - 48 - 100/130 - 200/240
	50 Hz: 380/415	60 Hz: 208/277
	V DC	12 - 24 - 30 - 48 - 60 - 125 - 250
Operating range		0.7 to 1.1 Un
Consumption (VA or W)		Pick-up: 10
Response time (ms)		50

### Circuit breaker control by MN or MX

When the circuit breaker has been tripped by an MN or MX release, it must be reset before it can be reclosed.

MN or MX tripping takes priority over manual closing.

In the presence of a standing trip order, closing of the contacts, even temporary, is not possible.

Connection using wires up to  $1.5\text{mm}^2$  to integrated terminal blocks.

**Note:** circuit breaker opening using an MN or MX release must be reserved for safety functions. This type of tripping increases wear on the opening mechanism. Repeated use reduces the mechanical endurance of the circuit breaker by 50 %.

# Accessories and auxiliaries

## Rotary handles

There are two types of rotary handle:

- direct rotary handle
- extended rotary handle.

PB106453



EasyPact CVS with a rotary handle.

### Direct rotary handle

#### Standard handle

Degree of protection IP40, IK07.

The direct rotary handle maintains:

- visibility of and access to trip-unit settings
- suitability for isolation
- indication of the three positions O (OFF), I (ON) and tripped
- access to the "push to trip" button.

#### Device locking

The rotary handle facilitates circuit-breaker locking.

##### ■ Padlocking:

- standard situation, in the OFF position, using 1 to 3 padlocks, shackle diameter 5 to 8 mm, not supplied

PB106454



EasyPact CVS with an extended rotary handle installed at the back of a switchboard, with the keylock option and key.

### Extended rotary handle

Degree of protection IP56, IK08.

The extended rotary handle makes it possible to operate circuit breakers installed at the back of switchboards, from the switchboard front.

It maintains:

- visibility of and access to trip-unit settings
- suitability for isolation
- indication of the three positions O (OFF), I (ON) and tripped.

#### Device and door padlocking

Padlocking locks the circuit-breaker handle and disables door opening:

- standard situation, in the OFF position, using 1 to 3 padlocks, shackle diameter 5 to 8 mm, not supplied

#### Parts of the extended rotary handles

- A unit that replaces the front cover of the circuit breaker (secured by screws).
- An assembly (handle and front plate) on the door that is always secured in the same position, whether the circuit breaker is installed vertically or horizontally.
- An extension shaft that must be adjusted to the distance. The min/max distance between the back of circuit breaker and door is:
  - 185...600 mm for EasyPact CVS100 to 250
  - 209...600 mm for EasyPact CVS 400/630.

PB106455



PB106456





### Manual source-changeover systems


An additional accessory interlocks two devices with rotary handles to create a source-changeover system. Closing of one device is possible only if the second is open.

This function is compatible with direct or extended rotary handles.


Up to three padlocks can be used to lock in the OFF or ON position.




*Toggle locking using padlocks and an accessory:*  
Removable device      Fixed device attached to the case.



*Rotary-handle locking using a keylock.*



*Rotary-handle locking using a padlock or a keylock.*



*Sealing accessories.*

### Locks

Locking in the OFF position guarantees isolation as per IEC 60947-2. Padlocking systems can receive up to three padlocks with shackle diameters ranging from 5 to 8 mm (padlocks not supplied). Certain locking systems require an additional accessory.


Control device	Function	Means	Required accessories
Toggle	Lock in OFF position	Padlock	Removable device
	Lock in OFF or ON position	Padlock	Fixed device
Direct rotary handle	Lock in ■ OFF position ■ OFF or ON position <sup>(1)</sup>	Padlock	-
	Keylock	Locking device + keylock	
Extended rotary handle	Lock in ■ OFF position ■ OFF or ON position <sup>(1)</sup> with door opening prevented <sup>(2)</sup>	Padlock	-
	Lock in OFF position	Padlock	UL508 control accessory
	■ OFF or ON position <sup>(1)</sup> inside the switchboard	Keylock	Locking device + keylock

<sup>(1)</sup> Following a simple modification of the mechanism.


<sup>(2)</sup> Unless door locking has been voluntarily disabled.

### Sealing accessories

#### Toggle control



#### Rotary handle



#### Access to Vigi-module settings



#### Types of seals

#### Protected operations

#### Protection cover for settings

- modification of settings.

# Accessories and auxiliaries


## Escutcheons and protection collars

Escutcheons are an optional feature mounted on the switchboard door. They increase the degree of protection to IP40, IK07. Protection collars maintain the degree of protection, whatever the position of the device (connected, disconnected).


### IP40 escutcheons for fixed devices

There are three types of escutcheon with a gasket which are screwed to the door cut-out:

- three escutcheons for all control types (toggle, handle or motor mechanism)
- a wide model for Vigi modules that can be combined with the above.

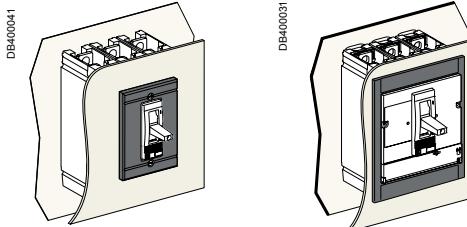

*Escutcheon for toggle without and with access to the trip unit.*



*Escutcheon for Vigi module.*

# Installation recommendations



---

*Functions and characteristics* A-1

**Operating conditions and temperature derating** B-2

---

**Installation in switchboards**

Power supply and weights B-4

Safety clearances and minimum distances B-5

Installation example B-6

*Dimensions and connection* C-1


D-1

E-1



*Additional characteristics*

*Catalogue numbers*

When thermal-magnetic trip units are used at ambient temperatures other than 40 °C, the Ir pick-up is modified.

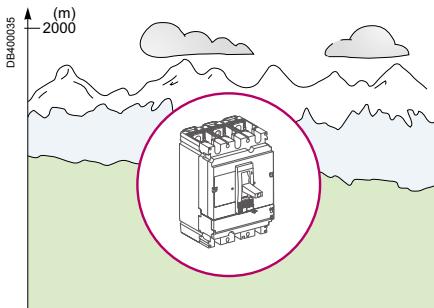

Electronic trip units are not affected by variations in temperature. If the trip units are used in high-temperature environments, the ETS setting must nevertheless take into account the temperature limits of the circuit breaker.

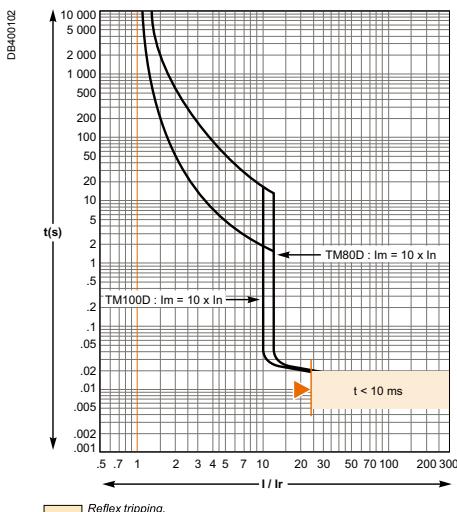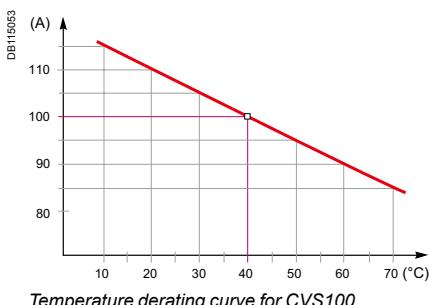

Thermal-protection curve with minimum and maximum values.

## Altitude derating

Altitude does not significantly affect the characteristics of EasyPact CVS circuit breakers up to 2000 m. Above this altitude, it is necessary to take into account the decrease in the dielectric strength and cooling capacity of air.

## Vibrations

CVS devices resist electromagnetic or mechanical vibrations.

Tests are carried out in compliance with standard IEC 60068-2-6 for the levels required by merchant-marine inspection organisations (Veritas, Lloyds, etc.):

- 2 to 13.2 Hz: amplitude  $\pm 1$  mm

- 13.2 to 100 Hz: constant acceleration 0.7 g.

Excessive vibration may cause tripping, breaks in connections or damage to mechanical parts.

## Degree of protection

CVS circuit breakers have been tested for degree of protection (IP) and mechanical impact protection (IK). See page A-3.

The overload protection is calibrated at 40 °C in the lab. This means that when the ambient temperature is less than or greater than 40 °C, the Ir protection pick-up is slightly modified.

To obtain the tripping time for a given temperature:

- see the tripping curves for 40 °C (see pages D-2 and D-3)

- determine tripping times corresponding to the Ir value (thermal setting on the device), corrected for the ambient temperature as indicated in the tables below.

## Settings of CVS100 to 630 equipped with TM-D trip units as a function of the temperature

The table indicates the real Ir (A) value for a given rating and temperature.

Rat. Temperature (°C)													
(A)	10	15	20	25	30	35	40	45	50	55	60	65	70
16	18.4	18	18	18	17	16.6	16	15.6	15.2	14.8	14.5	14	13.8
25	28.8	28	27.5	27	26.3	25.6	25	24.5	24	23.5	23	22	21
32	36.8	36	35.2	34.4	33.6	32.8	32	31.3	30.5	30	29.5	29	28.5
40	46	45	44	43	42	41	40	39	38	37	36	35	33.5
50	57.5	56	55	54	53	51	50	49	47	46	44	43	41
63	73	72	70	68	67	65	63	61	59	57	55	53	50
80	92	90	88	86	84	82	80	78	75.5	73	70.7	68	65
100	114	112	110	107	105	102.5	100	97	95	92.0	89	86	83
125	144	141	138	134	131	128	125	122	119	116	113	109	106
160	184	180	176	172	168	164	160	156	152	148	144	140	136
200	230	225	220	215	210	205	200	195	190	185	180	175	170
250	288	281	277	269	263	256	250	244	238	231	225	219	213
320	365	358	350.5	343	335.6	328	320	312	303.6	295	286	277	267.7
400	456.6	447.7	438.6	429	419.7	410	400	390	379.3	368.5	357.3	345.8	334
500	558.6	549	539.7	530	520.3	510.2	500	489.6	479	468	457	445.4	433.6
600	672	660.5	649	637	625	612.6	600	587	574	560.6	547	532.7	518

### CVS400 and 630 (equipped with ETS2.3 electronic trip unit)


The table below indicates the maximum long-time (LT) protection setting Ir (A) depending on the ambient temperature.

Type of device	Rating (A)	Temperature (°C)						
		40	45	50	55	60	65	70
<b>CVS400</b>								
Fixed	<b>400</b>	400	400	400	390	380	370	360
<b>CVS630</b>								
Fixed	<b>630</b>	630	615	600	585	570	550	535

### Additional derating coefficient for an add-on module

For fixed circuit breakers equipped with a Vigi module, the coefficients in the table below must be applied.

Circuit breaker	Trip unit	Coefficient
CVS400	TMD320	0.98
	TMD400	0.94
	ETS2.3	0.97
CVS630	TMD500	0.9
	TMD600	0.89
	ETS2.3	0.9

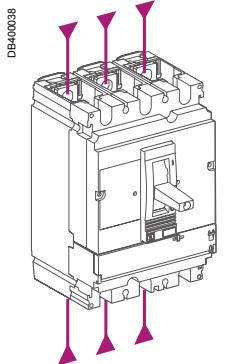

### Power supply from the top or bottom

CVS circuit breakers can be supplied from either the top or the bottom, even when equipped with a Vigi earth-leakage protection module, without any reduction in performance. This capability facilitates connection when installed in a switchboard. All connection and insulation accessories can be used on circuit breakers supplied either from the top or bottom.

### Weight

The table below presents the weights (in kg) of the circuit breakers and Vigi module.

Type of device	Circuit breakers		Vigi module
	CVS with TM-D	CVS with ETS	
CVS100	3P 3D	1.64	-
	4P 4D	2.01	-
	4P 3D	2.01	-
CVS160	3P 3D	1.60	-
	4P 4D	2.08	-
	4P 3D	2.08	-
CVS250	3P 3D	1.79	-
	4P 4D	2.39	-
	4P 3D	2.39	-
CVS400	3P 3D	4.37	4.71
	4P 4D	5.83	6.32
	4P 3D	2.39	-
CVS630	3P 3D	4.80	5.24
	4P 4D	6.40	7.14
	4P 3D	2.39	-

### General rules

When installing a circuit breaker, minimum distances (safety clearances) must be maintained between the device and panels, bars and other protection devices installed nearby. These distances, which depend on the ultimate breaking capacity, are defined by tests carried out in accordance with standard IEC 60947-2.

If installation conformity is not checked by type tests, it is also necessary to:



- use insulated bars for circuit-breaker connections
- segregate the busbars using insulating screens.

For CVS100 to 630 devices, terminal shields and interphase barriers are recommended and may be mandatory depending on the operating voltage of the device and type of installation (fixed, withdrawable, etc.).

### Power connections

The table below indicates the rules to be respected for CVS100 to 630 devices to ensure insulation of live parts for fixed devices.


#### CVS100 to 630: rules to be respected to ensure insulation of live parts

Type of connection	Fixed, front connection			Fixed, rear connection
Possible, recommended or mandatory accessories: With:	No insulating accessory	Interphase barriers 	Long terminal shields <sup>(1)</sup> 	Short terminal shields 
operating voltage	type of conductor			
≤ 440 V	Insulated bars 	Possible	Possible	Possible
	Extension terminals Cables + crimp lugs 	No	Mandatory (supplied) 	Possible (instead of ph. barriers) 
	Bare cables + connectors 	Possible for CVS100 to 250 	Possible for CVS100 to 250 	Possible for CVS100 to 250 
		No	Mandatory (supplied) 	Possible (instead of ph. barriers) 


<sup>(1)</sup> Long terminal shields provide a degree of protection of IP40 (ingress) and IK07 (mechanical impact).

### Safety clearance

Minimum distance between two adjacent circuit breakers






Minimum distance between circuit breaker and front or rear panels

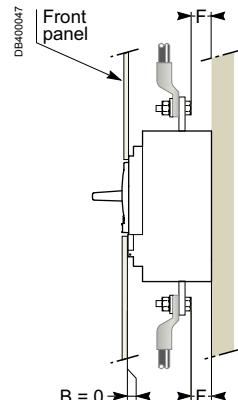

Bare or painted sheet metal

**Note:** if  $F < 8 \text{ mm}$ : an insulating screen or long terminal shield is mandatory.

Minimum distance between circuit breaker and top, bottom or side panels




Devices without accessories.

Devices with interphase barriers or long terminal shields.

### Minimum safety clearances for CVS100 to 630

Dimensions (mm) Compact circuit breaker	Insulation, insulated bars or painted sheet metal			Bare sheetmetal			
	C1	D1	D2	C1	D1	D2	A1
CVS100-250 U ≤ 440V	0	30	30	5	35	35	0
CVS400-630 U ≤ 440V	0	30	30	5	60	60	0

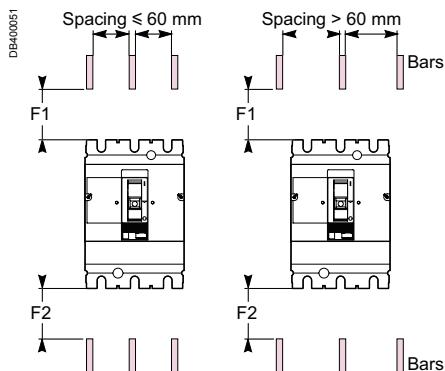

Live busbars.

### Clearances with respect to live bare busbars

Minimum clearances for CVS100 to 630

Operating voltage	Clearances with respect to live bare busbars			
	spacing $\leq 60$ mm		spacing $> 60$ mm	
F1	F2	F1	F2	
U < 440 V	350	350	80	80
U = 440 V	350	350	120	120

*These clearances can be reduced for special installations as long as the configuration is checked by tests.*

# Dimensions and connection



---



<i>Functions and characteristics</i>	A-1
<i>Installation recommendations</i>	B-1
<b>Dimensions and mounting</b>	<b>C-2</b>
EasyPact CVS100 to 630	C-2
Vigi CVS100 to 630	C-3
<b>Front-panel accessories</b>	<b>C-4</b>
EasyPact CVS100 to 630	C-4
<b>Front-panel cutouts</b>	<b>C-5</b>
EasyPact CVS100 to 630	C-5
Vigi CVS100 to 630	C-6
<b>Power connections</b>	<b>C-7</b>
EasyPact and Vigi CVS100 to 630	C-7
Connection of insulated bars or cables with lugs to EasyPact and Vigi	
CVS100 to 630	C-10
Connection of bare cables to EasyPact and Vigi CVS100 to 630	C-11

<i>Additional characteristics</i>	D-1
<i>Catalogue numbers</i>	E-1

## Dimensions and connection

## Dimensions and mounting EasyPact CVS100 to 630


### Dimensions

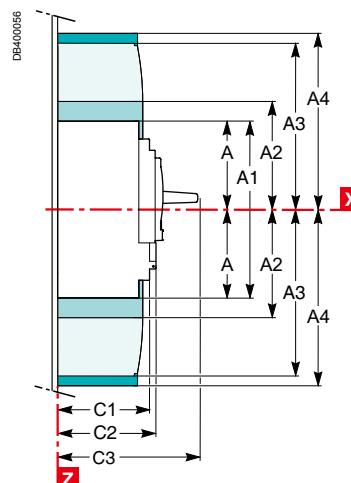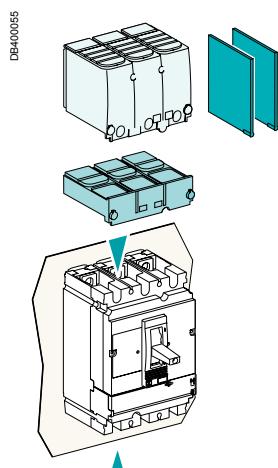

Long terminal shields (also available for CVS400/630 spreaders with 52.5 mm pitch:  
 $B_1 = 157.5 \text{ mm}$ ,  $B_2 = 210 \text{ mm}$ ).


### Mounting

#### On backplate




#### CVS100 to 250

##### 3P

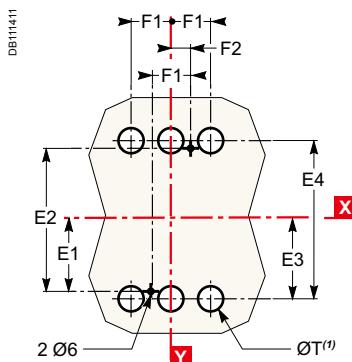


#### CVS400/630

##### 3P

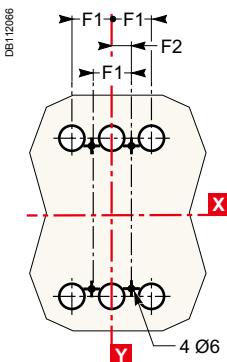


#### CVS100 to 630

##### 4P

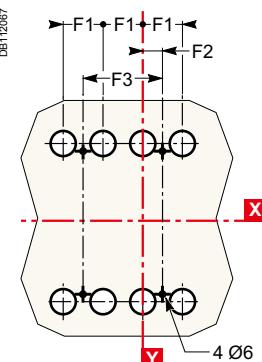


<sup>(1)</sup> The ØT holes are required for rear connection only.


#### On rails




##### 3P

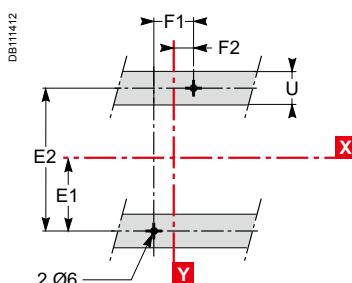


##### 3P




##### 4P



#### On DIN rail with adaptor plate (CVS100 to 250)




DB400169




# Dimensions and mounting Vigi CVS100 to 630


## Dimensions

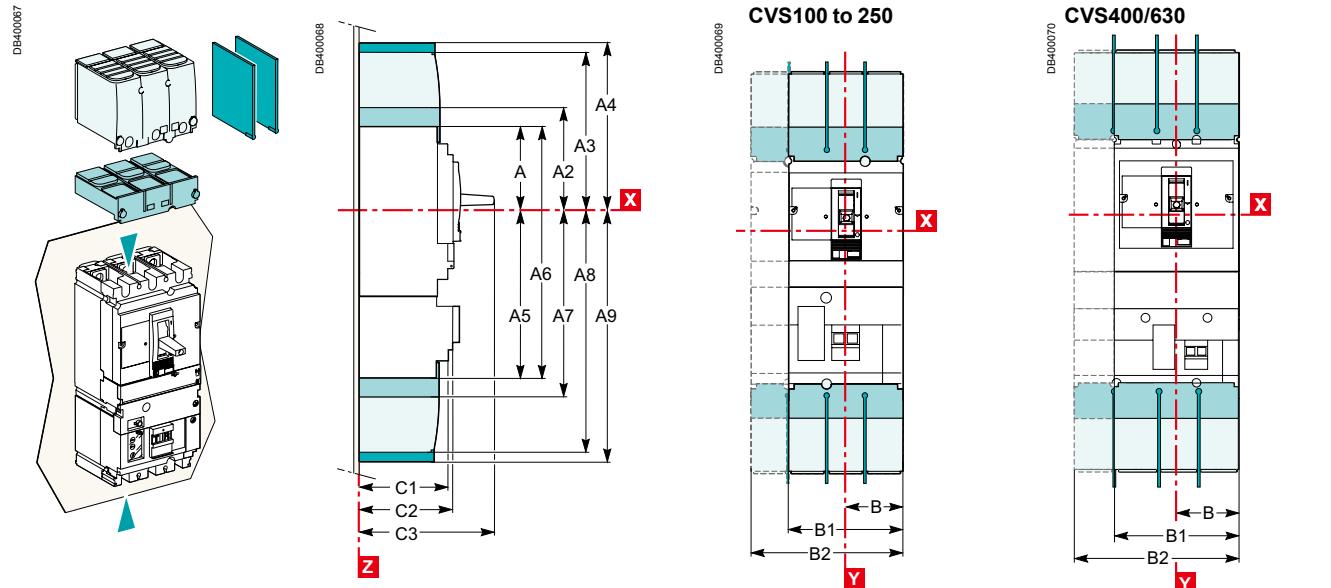

## Mounting

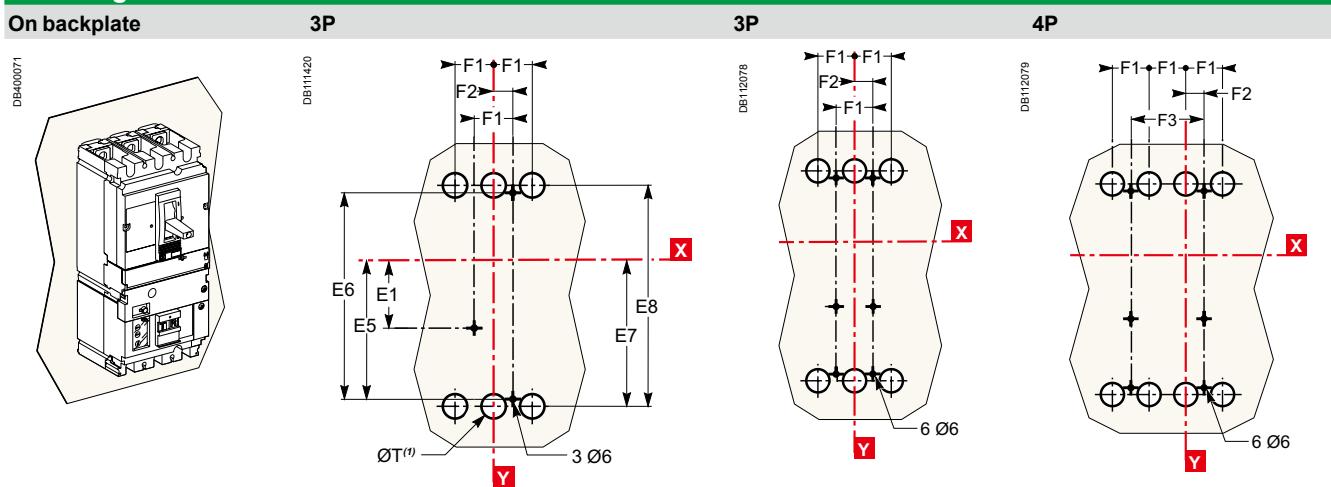

(1) The ØT holes are required for rear connection only.

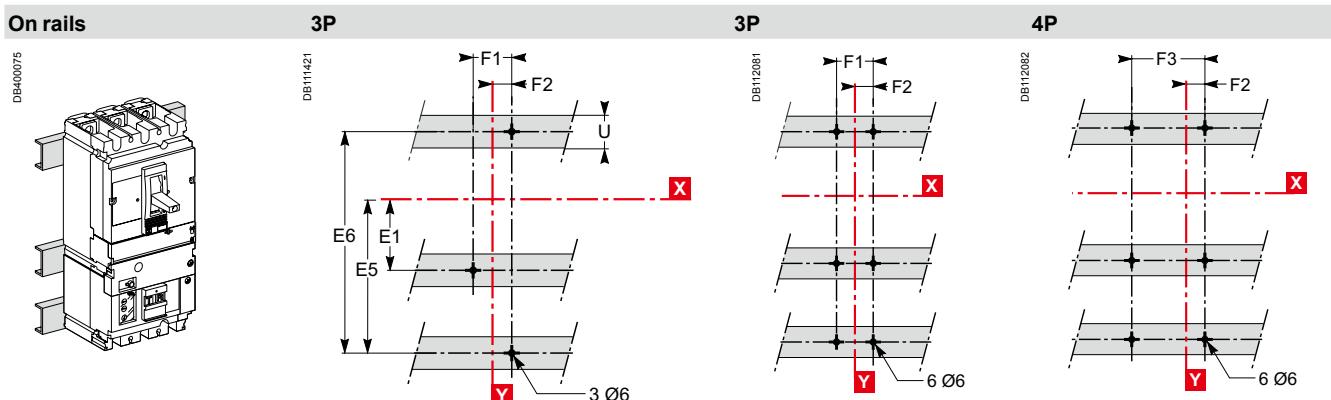





Type	A	A1	A2	A3	A4	A5	A6	A7	A8	A9	B	B1	B2	C1	C2	C3	E1
CVS100/160/250	80.5	161	94	145	178.5	155.5	236	169	220	253.5	52.5	105	140	81	86	126	62.5
CVS400/630	127.5	255	142.5	200	237	227.5	355	242.5	300	337	70	140	185	95.5	110	168	100
Type	E2	E3	E4	E5	E6	E7	E8	F1	F2	F3	G1	G2	G3	G4	G5	ØT	U
CVS100/160/250	125	70	140	137.5	200	145	215	35	17.5	70	95	75	13.5	23	17.5	24	≤ 32
CVS400/630	200	113.5	227	200	300	213.5	327	45	22.5	90	-	-	-	-	-	32	≤ 35

## Dimensions and connection





## Front-panel accessories EasyPact CVS100 to 630

### IP40 front-panel escutcheons





For toggle



For rotary handle or module and protection collar



For Vigi

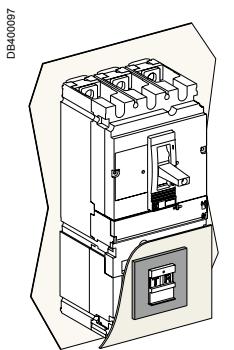



Type	A1	A2	A3	B1	M2	M3
CVS100/160/250	91	114	101	157	115	102
CVS400/630	123	164	151	189	155	142

# Front-panel cutouts

## EasyPact CVS100 to 630

### Bare sheet metal





For toggle



### CVS100 to 250

### CVS400/630

For toggle with access to trip unit

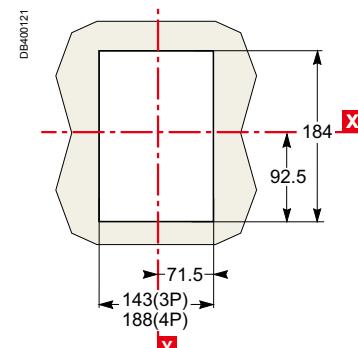



Type	P3	P4	R	R1
CVS100/160/250	88	83	14.5	29
CVS400/630	112	107	31.5	63

## Dimensions and connection

## Front-panel cutouts Vigi CVS100 to 630


### Bare sheet metal

For toggle



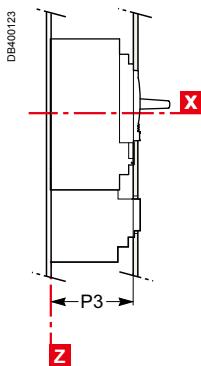
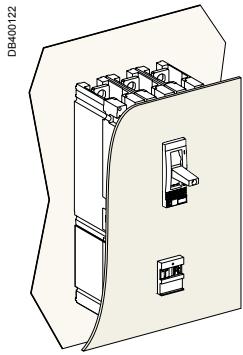


### CVS100 to 250

### CVS400/630

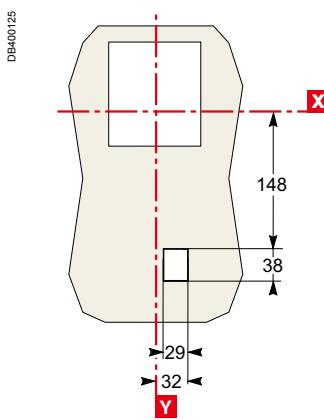



For toggle with access to trip unit

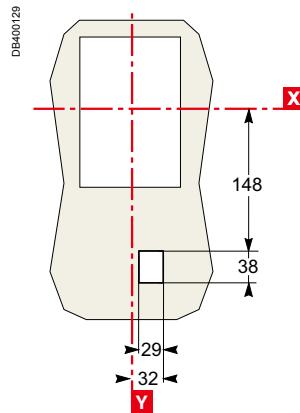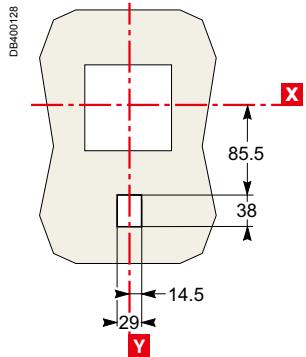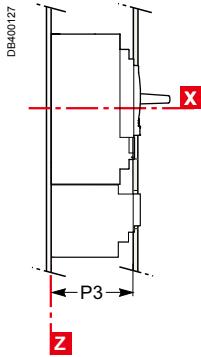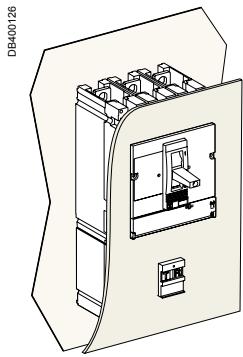

# Power connections

## EasyPact and Vigi CVS100 to 630




### Connection locations

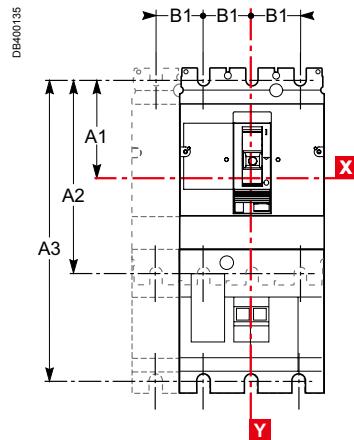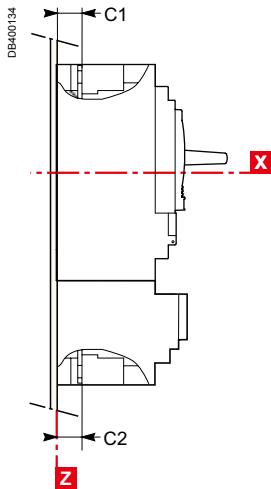

Type	A1	A2	B1	C1	C2
CVS100/160	70	140	35	19.5	19.5
CVS250	70	140	35	21.5	19.5
CVS400/630	113.5	227	45	26	26




Type	A1	A3	B1	C1	C2
CVS100/160 + Vigi	70	215	35	19.5	21.5
CVS250 + Vigi	70	215	35	21.5	21.5
CVS400/630 + Vigi	113.5	327	45	26	26

### Front connection without accessories



### Connection with accessories

#### Long and short rear connectors

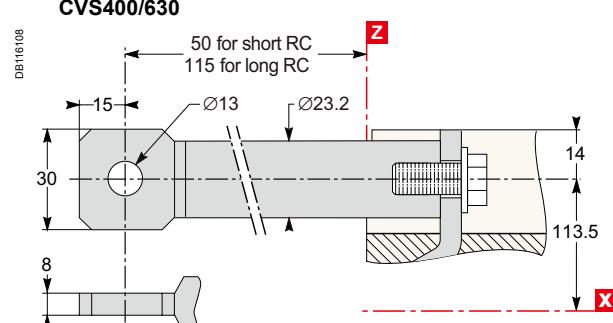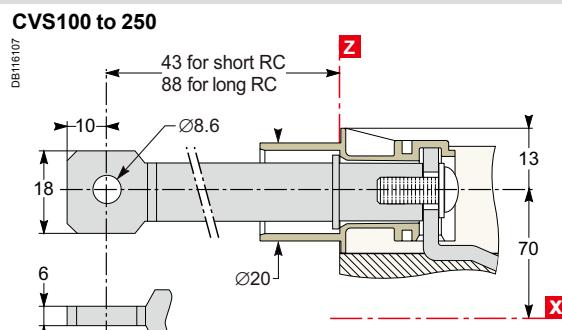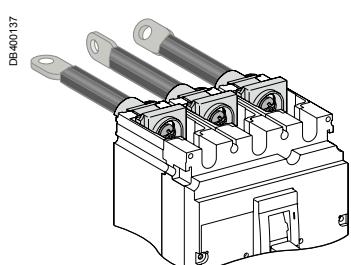


## Dimensions and connection

## Power connections EasyPact and Vigi CVS100 to 630


### Connection with accessories (cont.)

#### Bare-cable connectors

DB400138




**CVS100 to 250**




DB115451

DB400139





**CVS400/630**



DB115454


DB115452



DB115455

#### Distribution connectors (for CVS100 to 250 only)


DB115456



**CVS100 to 250**

DB115457


(a) Vigi module  
or CVS250.



DB115459


**CVS100 to 250**

**CVS100 to 250**




DB115460

**CVS400/630**



#### Right-angle terminal extensions (upstream only)


DB400140



(b) CVS250.


**CVS100 to 250**

DB115459




DB115462

**CVS400/630**




#### Straight terminal extensions (for CVS100 to 250 only)

DB400141



DB115462



# Power connections

## EasyPact and Vigi CVS100 to 630





### Connection with accessories (cont.)

Spreaders


3P

4P

**CVS100 to 250**

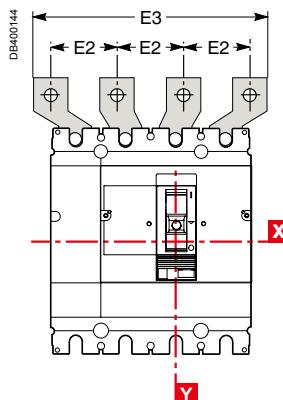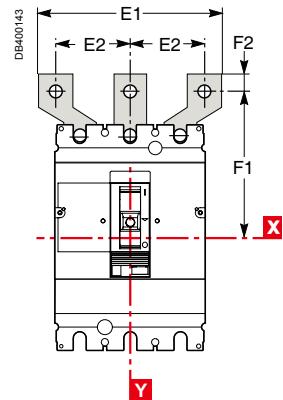

**CVS400/630**





Type	C3	C4	E1	E2	E3	F1	F2
CVS100/160	23.5	-	114	45	159	100	11
CVS250	25.5	-	114	45	159	100	11
CVS400/630	-	44	135 170	52.5 70	187.5 240	152.5 166	15 15

## Dimensions and connection


# Power connections

Connection of insulated bars or cables with lugs to EasyPact and Vigi CVS100 to 630

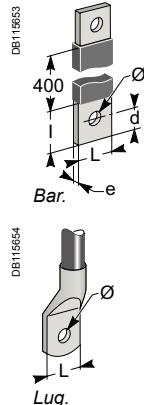

### Accessories for CVS100 to 250

#### Straight terminal extensions



Tinned copper


#### Spreaders: separate parts



Tinned copper

### Accessories for CVS400 and 630


#### Spreaders made up of separate parts for 52.5 and 70 mm pitch



Tinned copper

### Accessories for CVS100 to 630

#### Right-angle terminal extensions



Tinned copper

To be mounted on upstream side.

### Direct connection to CVS100 to 630

Dimensions	CVS100	CVS160/250	CVS400/630
<b>Bars</b>	L (mm) $\leq 25$ I (mm) $d + 10$ d (mm) $\leq 10$ e (mm) $\leq 6$ $\emptyset$ (mm) 6.5	$\leq 25$ $d + 10$ $\leq 10$ $\leq 6$ 8.5	$\leq 32$ $d + 15$ $\leq 15$ $3 \leq e \leq 10$ 10.5
<b>Lugs</b>	L (mm) $\leq 25$ $\emptyset$ (mm) 6.5	$\leq 25$ 8.5	$\leq 32$ 10.5
<b>Torque (Nm)</b> (1)	10	15	50
<b>Torque (Nm)</b> (2)	5/5	5/5	20/11

(1) Tightening torque on the circuit breaker for lugs or bars.

(2) Tightening torque on fixed devices for rear connectors.

### Connection with accessories to CVS100 to 250 (IEC 228)

#### Pole pitch

Without spreaders	35 mm	
With spreaders	45 mm	
Dimensions	With spreaders or terminal extensions	
	CVS100 CVS160/250	
<b>Bars</b>	L (mm) $\leq 25$ I (mm) $20 \leq I \leq 25$ d (mm) $\leq 10$ e (mm) $\leq 6$ $\emptyset$ (mm) 6.5	$\leq 25$ $20 \leq I \leq 25$ $\leq 10$ $\leq 6$ 8.5
<b>Lugs</b>	L (mm) $\leq 25$ $\emptyset$ (mm) 6.5	$\leq 25$ 8.5
<b>Torque (Nm)</b> (1)	10	15

(1) Tightening torque on the circuit breaker for spreaders or terminal extensions.

Spreaders and straight, right-angle, 45°, double-L and edgewise terminal extensions are supplied with flexible interphase barriers.


### Connection with accessories to CVS400 and 630 (IEC 228)

#### Pole pitch

Without spreaders	45 mm	
With spreaders	52.5 or 70 mm	
Dimensions	With spreaders With terminal extensions	
	CVS100 CVS160/250 CVS400/630	
<b>Bars</b>	L (mm) $\leq 40$ I (mm) $d + 15$ d (mm) $\leq 20$ e (mm) $3 \leq e \leq 10$ $\emptyset$ (mm) 12.5	$\leq 32$ $30 \leq I \leq 34$ $\leq 15$ $3 \leq e \leq 10$ 10.5
<b>Lugs</b>	L (mm) $\leq 40$ $\emptyset$ (mm) 12.5	$\leq 32$ 10.5
<b>Torque (Nm)</b> (1)	50	50

(1) Tightening torque on the circuit breaker for spreaders or terminal extensions.

Spreaders and right-angle, 45° and edgewise terminal extensions are supplied with flexible interphase barriers.




Mounting detail: 2 cables with lugs.


# Power connections

## Connection of bare cables to EasyPact and Vigi CVS100 to 630

DB400149

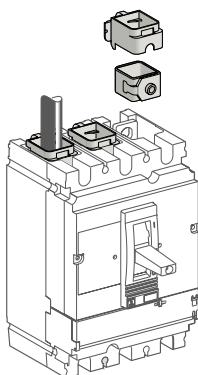

### Connection for CVS100 to 250




1-cable connector      2-cable connector

	1-cable connector	Steel ≤ 160 A	Aluminium ≤ 250 A	
L (mm)	25	25		
S (mm <sup>2</sup> ) Cu/Al	1.5 to 95 <sup>(1)</sup>	25 to 50	70 to 95	120 to 185 150 max. flex.
Torque (Nm)	12	20	26	26
	2-cable connector			
L (mm)	25 or 50			
S (mm <sup>2</sup> ) Cu/Al	2 x 50 to 2 x 120			
Torque (Nm)	22			

<sup>(1)</sup> For flexible cables from 1.5 to 4 mm<sup>2</sup>, connection with crimped or self-crimping ferrules.

### Connection to CVS400 and 630

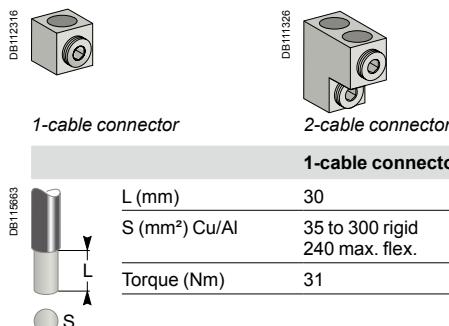

1-cable connector      2-cable connector

	1-cable connector	2-cable connector
L (mm)	30	30 or 60
S (mm <sup>2</sup> ) Cu/Al	35 to 300 rigid 240 max. flex.	2 x 35 to 2 x 240 rigid 240 max. flex.
Torque (Nm)	31	31

### Conductor materials and electrodynamic stresses

EasyPact CVS circuit breakers can be connected indifferently with bare-copper, tinned-copper and tinned-aluminium conductors (flexible or rigid bars, cables). In the event of a short-circuit, thermal and electrodynamic stresses will be exerted on the conductors. They must therefore be correctly sized and held in place by supports. Electrical connection points on switchgear devices (switch-disconnectors, contactors, circuit breakers, etc.) should not be used for mechanical support. Any partition between upstream and downstream connections of the device must be made of non-magnetic material.

# Additional characteristics




<i>Functions and characteristics</i>	A-1
<i>Installation recommendations</i>	B-1
<i>Dimensions and connection</i>	C-1

**Tripping curves**


EasyPact CVS100 to 630 Protection of distribution systems	D-2
EasyPact CVS100 to 250 Motor protection	D-5
Current and energy limiting curves	D-6

*Catalogue numbers*


E-1

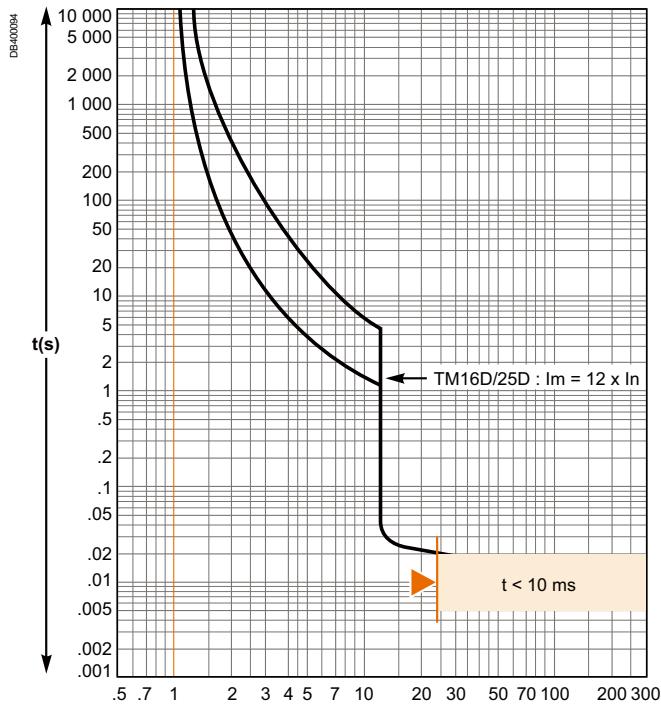**TM magnetic trip units****TM16D/25D**


Reflex tripping.

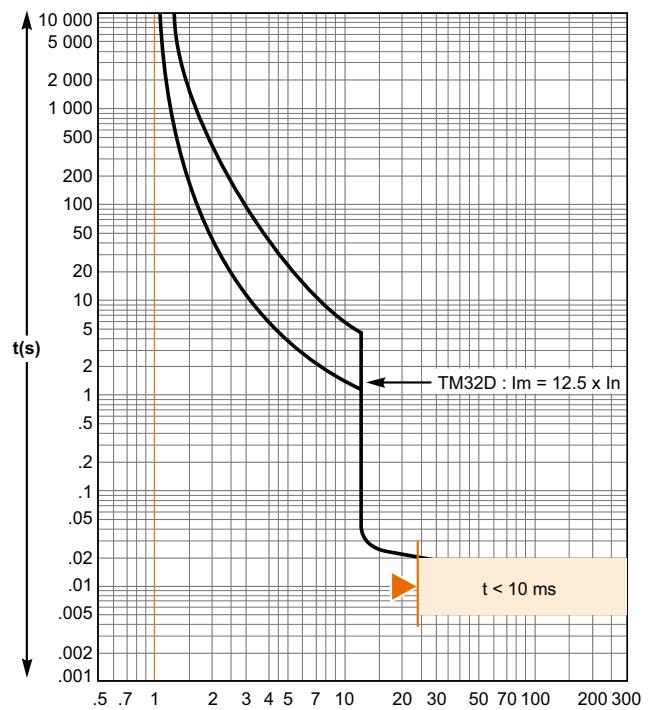**TM32D****TM32D**

Reflex tripping.

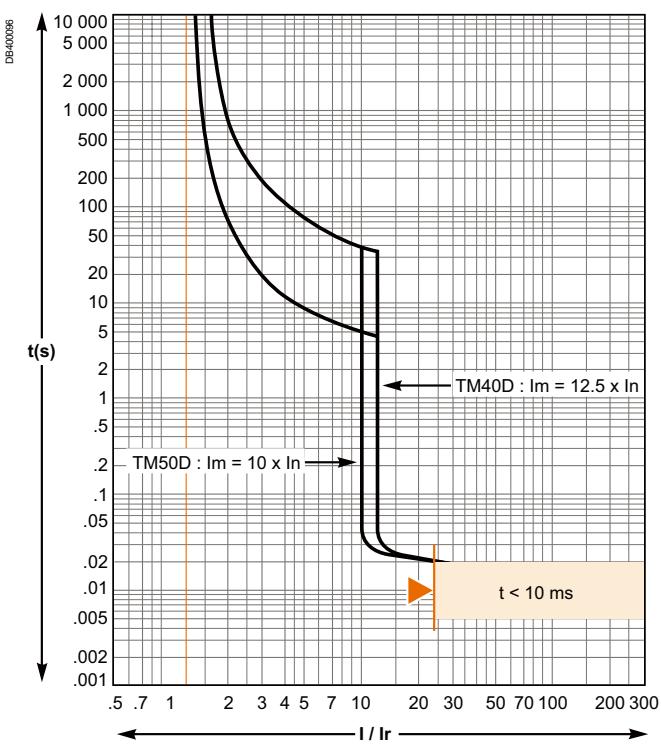**TM40D/50D**

Reflex tripping.

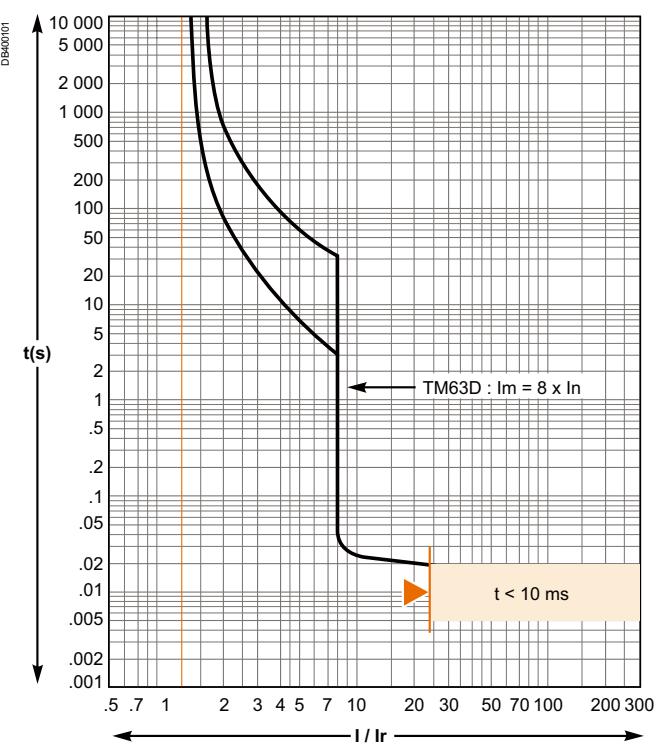**TM63D**

Reflex tripping.


# Tripping curves

## EasyPact CVS100 to 630

### Protection of distribution systems


#### TM magnetic trip units (cont.)

TM80D/100D

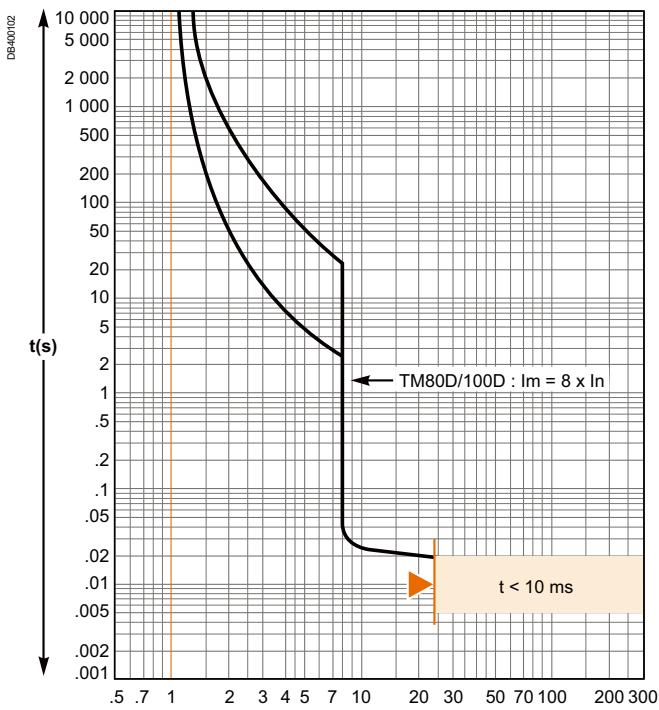


Reflex tripping.

TM125D/160D

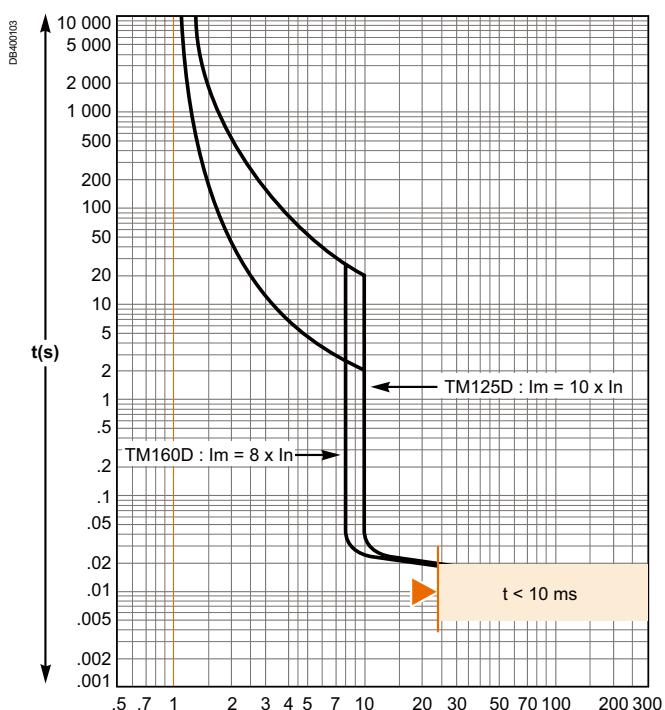


Reflex tripping.

TM200D/250D

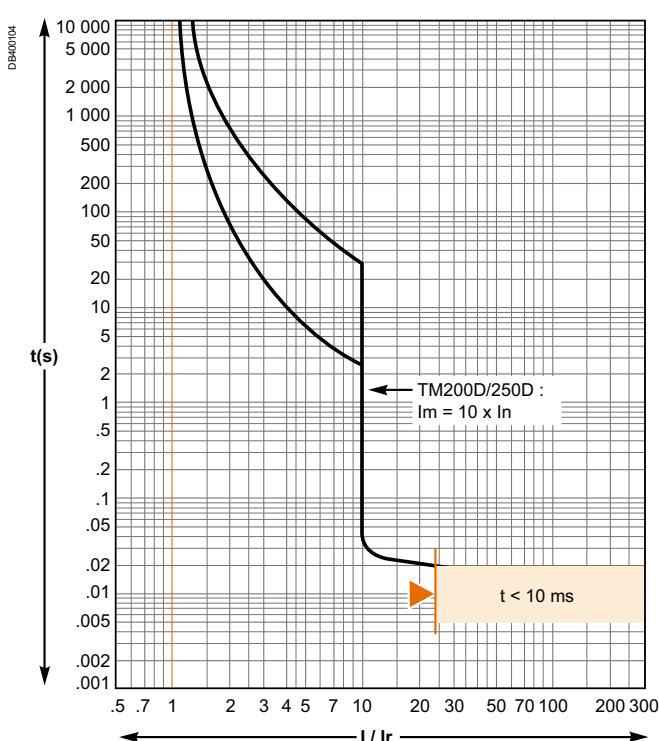

Reflex tripping.


TM320D/400D

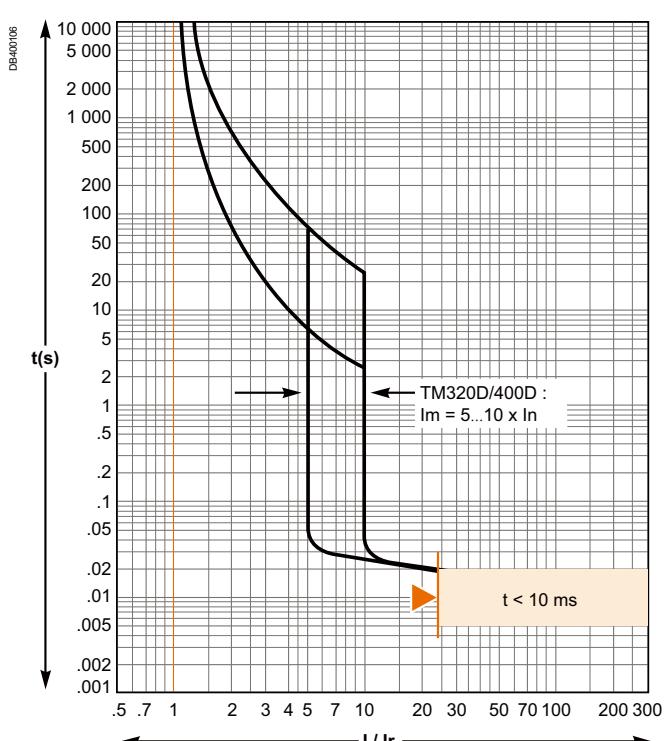


Reflex tripping.

## Additional characteristics

# Tripping curves EasyPact CVS400 to 630 Protection of distribution systems

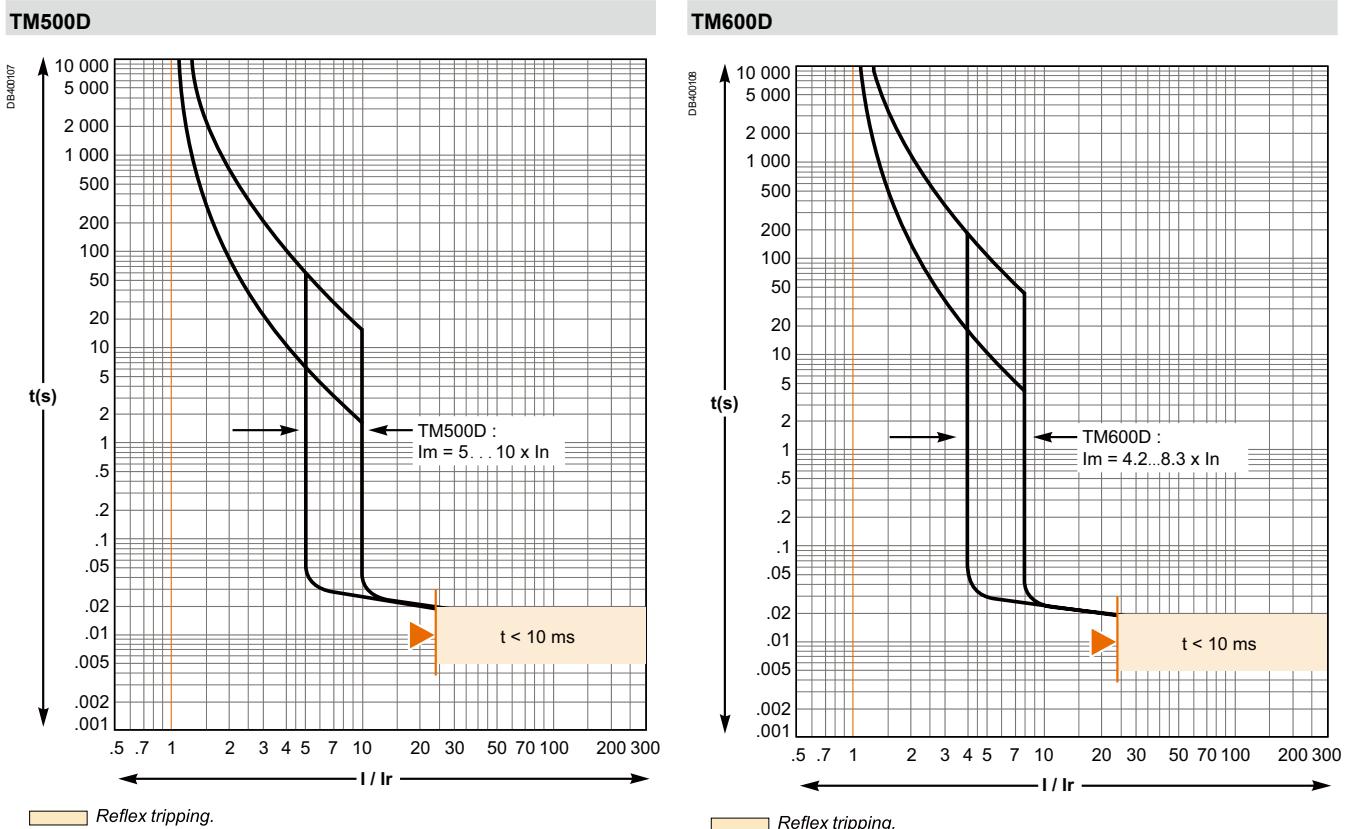

## ETS 2.3 electronic trip units

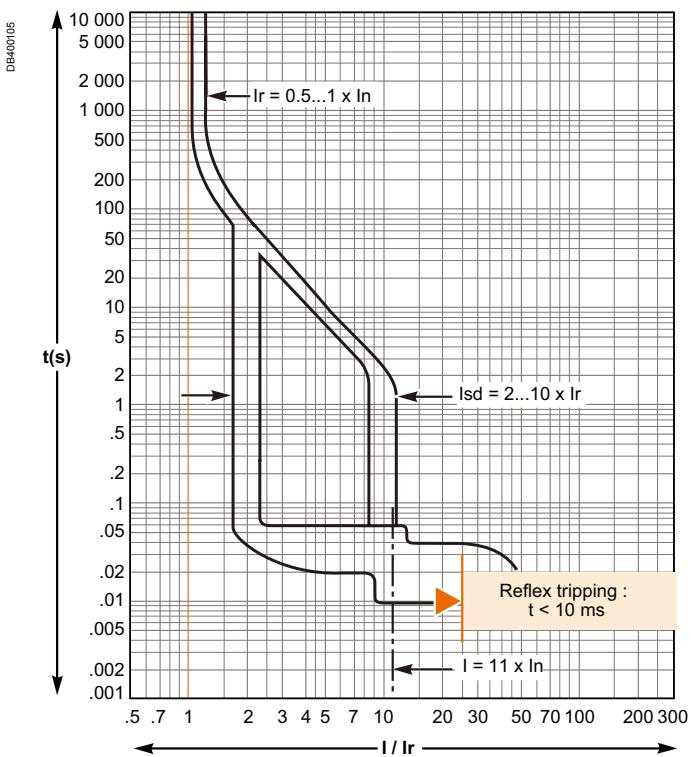


# Tripping curves

## EasyPact CVS100 to 250


### Motor protection

#### MA magnetic trip units

MA2.5... MA100

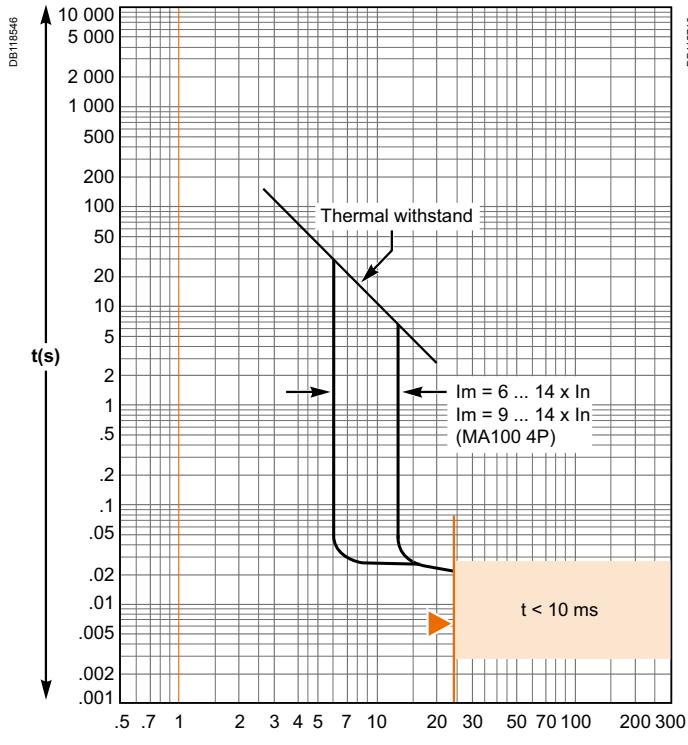


MA150 and MA220

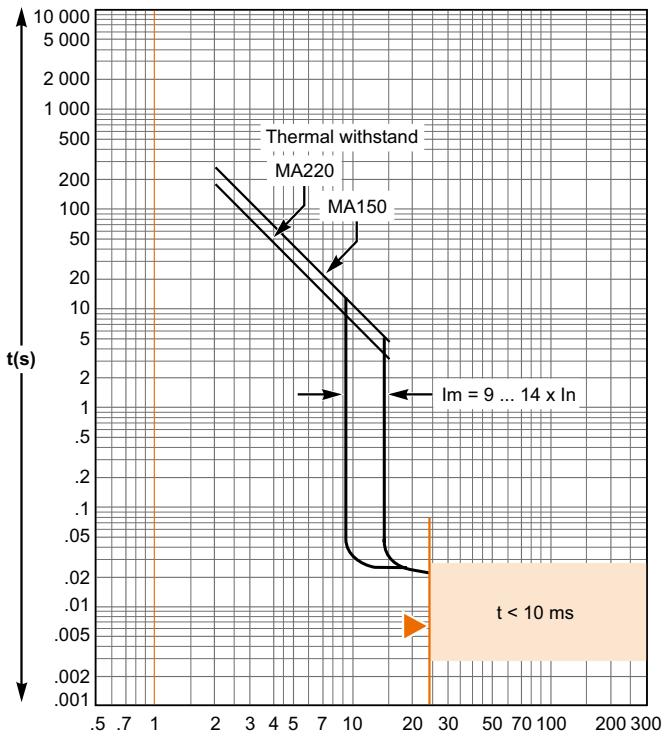


Reflex tripping.

MA320

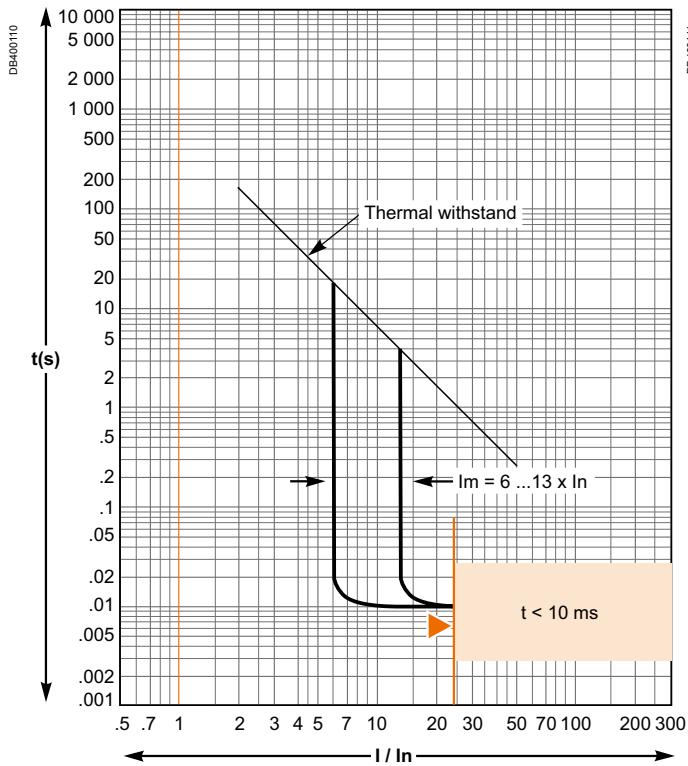


MA500

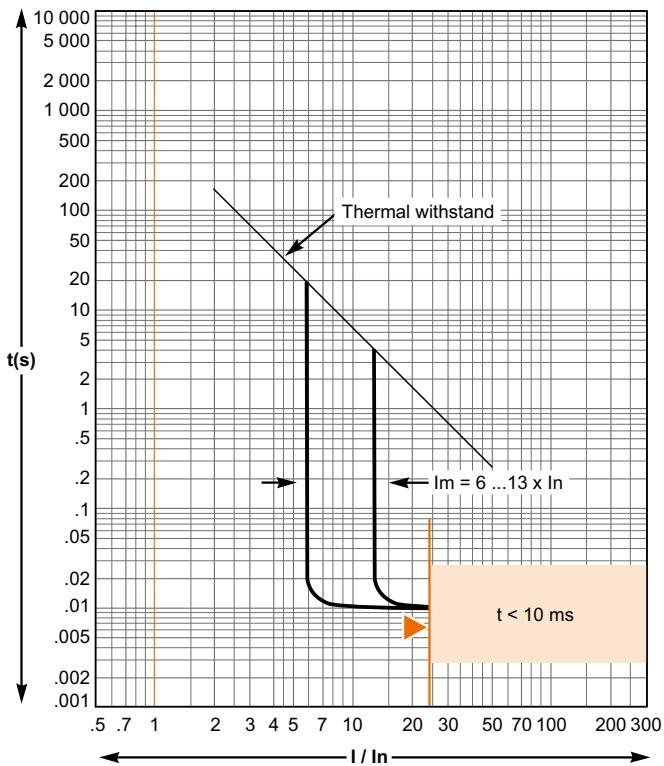

Reflex tripping.

Reflex tripping.

The limiting capacity of a circuit breaker is its aptitude to let through a current, during a short-circuit, that is less than the prospective short-circuit current.

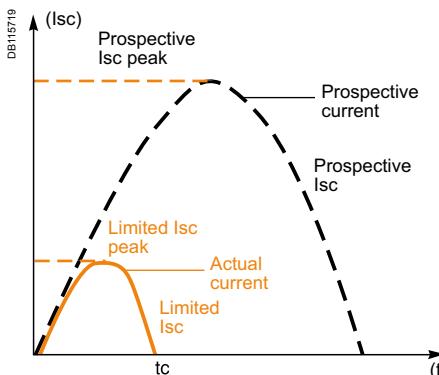

*The exceptional limiting capacity of the EasyPact CVS range is due to the rotating double-break technique (very rapid natural repulsion of contacts and the appearance of two arc voltages in-series with a very steep wave front).*

## Tripping curves Current and energy limiting curves

### Ics = 100 % Icu

The exceptional limiting capacity of the EasyPact CVS range greatly reduces the forces created by fault currents in devices.

The result is a major increase in breaking performance.

In particular, the service breaking capacity Ics is equal to 100 % of Icu.

The Ics value, defined by IEC standard 60947-2, is guaranteed by tests comprising the following steps:

- break three times consecutively a fault current equal to 100% of Icu
- check that the device continues to function normally, that is:
  - it conducts the rated current without abnormal temperature rise
  - protection functions perform within the limits specified by the standard
  - suitability for isolation is not impaired.

### Longer service life of electrical installations

Current-limiting circuit breakers greatly reduce the negative effects of short-circuits on installations.

#### Thermal effects

Less temperature rise in conductors, therefore longer service life for cables.

#### Mechanical effects

Reduced electrodynamic forces, therefore less risk of electrical contacts or busbars being deformed or broken.

#### Electromagnetic effects

Fewer disturbances for measuring devices located near electrical circuits.

### Current and energy limiting curves

The limiting capacity of a circuit breaker is expressed by two curves which are a function of the prospective short-circuit current (the current which would flow if no protection devices were installed):

- the actual peak current (limited current)
- thermal stress ( $A^2s$ ), i.e. the energy dissipated by the short-circuit in a conductor with a resistance of  $1\ \Omega$ .

### Maximum permissible cable stresses


The table below indicates the maximum permissible thermal stresses for cables depending on their insulation, conductor (Cu or Al) and their cross-sectional area (CSA). CSA values are given in  $mm^2$  and thermal stresses in  $A^2s$ .

CSA	1.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	4 mm <sup>2</sup>	6 mm <sup>2</sup>	10 mm <sup>2</sup>
PVC	Cu	2.97x10 <sup>4</sup>	8.26x10 <sup>4</sup>	2.12x10 <sup>5</sup>	4.76x10 <sup>5</sup>
	Al				5.41x10 <sup>5</sup>
PRC	Cu	4.10x10 <sup>4</sup>	1.39x10 <sup>5</sup>	2.92x10 <sup>5</sup>	6.56x10 <sup>5</sup>
	Al				7.52x10 <sup>5</sup>
CSA	16 mm <sup>2</sup>	25 mm <sup>2</sup>	35 mm <sup>2</sup>	50 mm <sup>2</sup>	
PVC	Cu	3.4x10 <sup>6</sup>	8.26x10 <sup>6</sup>	1.62x10 <sup>7</sup>	3.31x10 <sup>7</sup>
	Al	1.39x10 <sup>6</sup>	3.38x10 <sup>6</sup>	6.64x10 <sup>6</sup>	1.35x10 <sup>7</sup>
PRC	Cu	4.69x10 <sup>6</sup>	1.39x10 <sup>7</sup>	2.23x10 <sup>7</sup>	4.56x10 <sup>7</sup>
	Al	1.93x10 <sup>6</sup>	4.70x10 <sup>6</sup>	9.23x10 <sup>6</sup>	1.88x10 <sup>7</sup>


# Tripping curves

## Current and energy limiting curves

Current-limiting curves

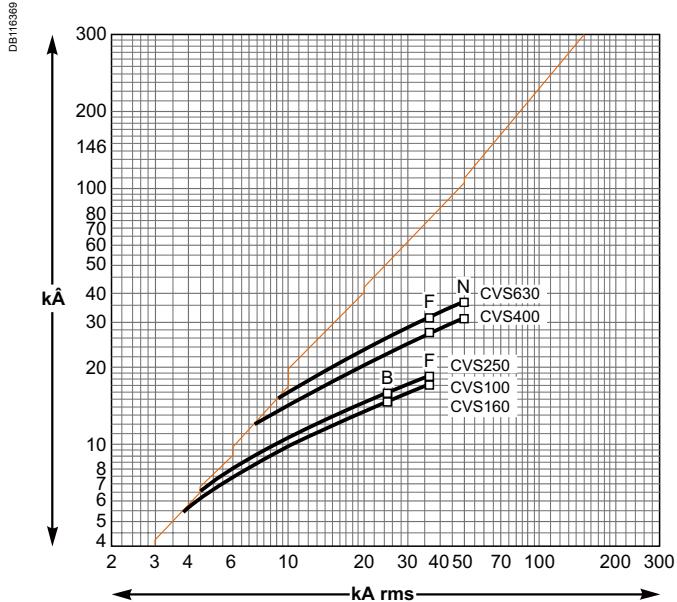

Energy-limiting curves

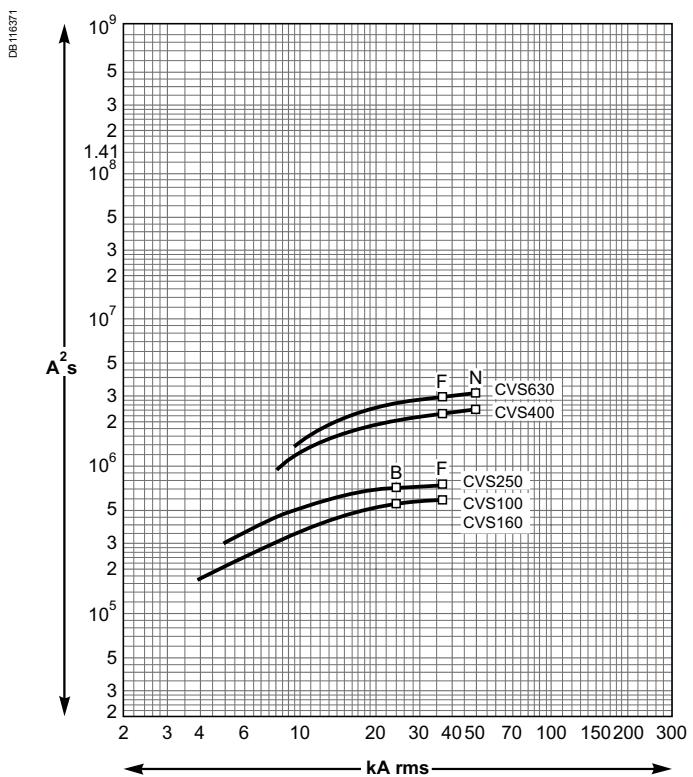

# Catalogue numbers



---

<i>Functions and characteristics</i>	A-1
<i>Installation recommendations</i>	B-1
<i>Dimensions and connection</i>	C-1
<i>Additional characteristics</i>	D-1
<b>EasyPact CVS100 to 250</b>	E-3
<b>EasyPact CVS400 to 630</b>	E-15



<b>CVS100/160/250B: complete fixed/FC device</b>	<b>E-4</b>
EasyPact and Vigi CVS100/160/250B (25 kA 380/415 V)	E-4
EasyPact and Vigi CVS100/160/250F (36 kA 380/415 V)	E-5
<b>CVS100/160/250F: complete fixed/FC device</b>	<b>E-6</b>
Vigi CVS100/160/250F (36 kA 380/415 V)	E-6
<b>CVS100/160/250N: complete fixed/FC device</b>	<b>E-7</b>
EasyPact CVS100/160/250NA	E-7
<b>Add-on Vigi module: EasyPact and Vigi</b>	<b>E-8</b>
CVS100/160/250	E-8
<b>Trip unit accessories</b>	<b>E-9</b>
EasyPact and Vigi CVS100/160/250	E-9
<b>Installation and connection</b>	<b>E-10</b>
EasyPact and Vigi CVS100/160/250	E-10
<b>Accessories</b>	<b>E-11</b>
EasyPact and Vigi CVS100/160/250	E-11


## Catalogue numbers

# CVS100/160/250B: complete fixed/FC device EasyPact and Vigi CVS100/160/250B (25 kA 380/415 V)

DBA00150

### EasyPact CVS100/160/250B

With TM-D thermal-magnetic trip unit



#### EasyPact CVS100B (25 kA at 380/415 V)

Rating	3P 3d	4P 3d	4P 4d
TM16D	LV510300	LV510310	LV510320
TM25D	LV510301	LV510311	LV510321
TM32D	LV510302	LV510312	LV510322
TM40D	LV510303	LV510313	LV510323
TM50D	LV510304	LV510314	LV510324
TM63D	LV510305	LV510315	LV510325
TM80D	LV510306	LV510316	LV510326
TM100D	LV510307	LV510317	LV510327

#### EasyPact CVS160B (25 kA at 380/415 V)


Rating	3P 3d	4P 3d	4P 4d
TM100D	LV516301	LV516311	LV516321
TM125D	LV516302	LV516312	LV516322
TM160D	LV516303	LV516313	LV516323

#### EasyPact CVS250B (25 kA at 380/415 V)

Rating	3P 3d	4P 3d	4P 4d
TM160D	LV525301	LV525311	LV525321
TM200D	LV525302	LV525312	LV525322
TM250D	LV525303	LV525313	LV525323

### EasyPact CVS100/160/250B

With Magnetic trip unit MA



#### EasyPact CVS100B (25 kA at 380/415 V)

Rating	3P 3d
MA2,5	LV510430
MA6,3	LV510431
MA12,5	LV510432
MA25	LV510433
MA50	LV510434
MA100	LV510435

#### EasyPact CVS160B (25 kA at 380/415 V)


Rating	3P 3d
MA100	LV516430
MA150	LV516431

#### EasyPact CVS250B (25 kA at 380/415 V)

Rating	3P 3d
MA150	LV525435
MA220	LV525436

### Vigi CVS100/160/250B

With TM-D thermal-magnetic trip unit



#### Vigi CVS100B (25 kA at 380/415 V) equipped with MH Vigi module (200 to 440 V)

Rating	3P 3d	4P 3d	4P 4d
TM16D	LV510360	LV510370	LV510380
TM25D	LV510361	LV510371	LV510381
TM32D	LV510362	LV510372	LV510382
TM40D	LV510363	LV510373	LV510383
TM50D	LV510364	LV510374	LV510384
TM63D	LV510365	LV510375	LV510385
TM80D	LV510366	LV510376	LV510386
TM100D	LV510367	LV510377	LV510387

#### Vigi CVS160B (25 kA at 380/415 V) equipped with MH Vigi module (200 to 440 V)

Rating	3P 3d	4P 3d	4P 4d
TM100D	LV516361	LV516371	LV516381
TM125D	LV516362	LV516372	LV516382
TM160D	LV516363	LV516373	LV516383


#### Vigi CVS250B (25 kA at 380/415 V) equipped with MH Vigi module (200 to 440 V)

Rating	3P 3d	4P 3d	4P 4d
TM160D	LV525361	LV525371	LV525381
TM200D	LV525362	LV525372	LV525382
TM250D	LV525363	LV525373	LV525383

# CVS100/160/250F: complete fixed/FC device EasyPact and Vigi CVS100/160/250F (36 kA 380/415 V)

## EasyPact CVS100/160/250F


With TM-D thermal-magnetic trip unit



EasyPact CVS100F (36 kA at 380/415 V)			
Rating	3P 3d	4P 3d	4P 4d
TM16D	LV510330	LV510340	LV510350
TM25D	LV510331	LV510341	LV510351
TM32D	LV510332	LV510342	LV510352
TM40D	LV510333	LV510343	LV510353
TM50D	LV510334	LV510344	LV510354
TM63D	LV510335	LV510345	LV510355
TM80D	LV510336	LV510346	LV510356
TM100D	LV510337	LV510347	LV510357
EasyPact CVS160F (36 kA at 380/415 V)			
Rating	3P 3d	4P 3d	4P 4d
TM100D	LV516331	LV516341	LV516351
TM125D	LV516332	LV516342	LV516352
TM160D	LV516333	LV516343	LV516353
EasyPact CVS250F (36 kA at 380/415 V)			
Rating	3P 3d	4P 3d	4P 4d
TM160D	LV525331	LV525341	LV525351
TM200D	LV525332	LV525342	LV525352
TM250D	LV525333	LV525343	LV525353


## EasyPact CVS100/160/250F

With MA magnetic trip unit



EasyPact CVS100F (36 kA at 380/415 V)			
Rating	3P 3d	3P 3d	3P 3d
MA2.5	LV510440		
MA6.3	LV510441		
MA12.5	LV510442		
MA25	LV510443		
MA50	LV510444		
MA100	LV510445		
EasyPact CVS160F (36 kA at 380/415 V)			
Rating	3P 3d	3P 3d	3P 3d
MA100	LV516439		
MA150	LV516440		
EasyPact CVS250F (36 kA at 380/415 V)			
Rating	3P 3d	3P 3d	3P 3d
MA150	LV525438		
MA220	LV525439		

**CVS100/160/250F:**  
**complete fixed/FC device (cont.)**  
**Vigi CVS100/160/250F**  
**(36 kA 380/415 V)**

**Vigi CVS100/160/250F****With TM-D thermal-magnetic trip unit****Vigi CVS100F (36 kA at 380/415 V) equipped with MH Vigi module (200 to 440 V)**

Rating	3P 3d	4P 3d	4P 4d
TM16D	LV510390	LV510400	LV510410
TM25D	LV510391	LV510401	LV510411
TM32D	LV510392	LV510402	LV510412
TM40D	LV510393	LV510403	LV510413
TM50D	LV510394	LV510404	LV510414
TM63D	LV510395	LV510405	LV510415
TM80D	LV510396	LV510406	LV510416
TM100D	LV510397	LV510407	LV510417

**Vigi CVS160F (36 kA at 380/415 V) equipped with MH Vigi module (200 to 440 V)**

Rating	3P 3d	4P 3d	4P 4d
TM100D	LV516391	LV516401	LV516411
TM125D	LV516392	LV516402	LV516412
TM160D	LV516393	LV516403	LV516413


**Vigi CVS250F (36 kA at 380/415 V) equipped with MH Vigi module (200 to 440 V)**

Rating	3P 3d	4P 3d	4P 4d
TM160D	LV525391	LV525401	LV525411
TM200D	LV525392	LV525402	LV525412
TM250D	LV525393	LV525403	LV525413

# CVS100/160/250NA: complete fixed/FC device EasyPact CVS100/160/250NA

## EasyPact CVS100/160/250NA switch-disconnector

With NA switch-disconnector unit




DB400155

### EasyPact CVS100NA

Rating	3P	4P
100	LV510425	LV510426
<b>EasyPact CVS160NA</b>		
Rating	3P	4P
160	LV516425	LV516426
<b>EasyPact CVS250NA</b>		
Rating	3P	4P
250	LV525425	LV525426

## VigiCompact CVS100/160/250NA switch-disconnector

With NA switch-disconnector unit




DB400153

### EasyPact CVS100NA

Rating	3P	4P
100	LV510427	LV510428
<b>EasyPact CVS160NA</b>		
Rating	3P	4P
160	LV516427	LV516428
<b>EasyPact CVS250NA</b>		
Rating	3P	4P
250	LV525427	LV525428

### + Vigi module or insulation monitoring


#### Vigi module






ME type for CVS100/160 (200 to 440V)	<b>3P</b> <b>LV429212</b>	<b>4P</b> <b>LV429213</b>
MH type for CVS100/160 (220 to 440 V)	<b>LV429210</b>	<b>LV429211</b>
MH type for CVS250 (220 to 440 V)	<b>LV431535</b>	<b>LV431536</b>

#### Connection accessories (Cu or Al)





##### Rear connections

DB112225		2 short		LV429235
		2 long		LV429236

##### Bare cable connectors

DB112226		Steel connectors	1 x (1.5 to 95 mm <sup>2</sup> ) ; ≤ 160 A	Set of 3	LV429242
				Set of 4	LV429243
DB112225		Aluminium connectors	1 x (25 to 95 mm <sup>2</sup> ) ; ≤ 250 A	Set of 3	LV429227
			1 x (120 to 185 mm <sup>2</sup> ) ; ≤ 250 A	Set of 4	LV429228
DB112228		Clips for connectors		Set of 3	LV429259
				Set of 4	LV429260
DB112227		Aluminium connectors for 2 cables <sup>(1)</sup>	2 x (50 to 120 mm <sup>2</sup> ) ; ≤ 250 A	Set of 3	LV429218
				Set of 4	LV429219
DB112224		6.35 mm voltage tap for steel or aluminium connectors		Set of 10	LV429348




##### Terminal extensions

DB112231		Edgewise terminal extensions <sup>(1)</sup>		Set of 3	LV429308
				Set of 4	LV429308
DB112232		Right-angle terminal extensions <sup>(1)</sup>		Set of 3	LV429261
				Set of 4	LV429262
DB112233		Straight terminal extensions <sup>(1)</sup>		Set of 3	LV429263
				Set of 4	LV429264
DB112235		Spreaders from 35 to 45 mm pitch <sup>(1)</sup>		3P	LV431563
				4P	LV431564

<sup>(1)</sup> Supplied with 2 or 3 interphase barriers.

# Accessories

## EasyPact and Vigi CVS100/160/250

Crimp lugs for copper cable <sup>(1)</sup>			
DB11237		For cable 120 mm <sup>2</sup>	Set of 3   LV429252
		For cable 150 mm <sup>2</sup>	Set of 4   LV429256
		For cable 185 mm <sup>2</sup>	Set of 3   LV429253
			Set of 4   LV429257
			Set of 3   LV429254
			Set of 4   LV429258
Crimp lugs for aluminium cable <sup>(1)</sup>			
DB11238		For cable 150 mm <sup>2</sup>	Set of 3   LV429504
		For cable 185 mm <sup>2</sup>	Set of 4   LV429505
			Set of 3   LV429506
			Set of 4   LV429507
Insulation accessories			
DB400161		1 short terminal shield for breaker	3 P   LV429515
			4 P   LV429516
DB400162		1 long terminal shield for breaker	3 P   LV429517
			4 P   LV429518
DB112241		Interphase barriers for breaker	Set of 6   LV429329
DB400163		2 insulating screens for breaker (45 mm pitch)	3P   LV429330
			4P   LV429331

<sup>(1)</sup> Supplied with 2 or 3 interphase barriers.

#### Electrical auxiliaries

##### Auxiliary contacts (changeover)

 DB12254	OF or SD or SDE or SDV OF or SD or SDE or SDV low level SDE adaptor, mandatory for trip unit TM, MA	<b>29450</b> <b>29452</b> <b>LV429451</b>
--	---	---

#### Voltage releases

 DB1454	AC  DC	Voltage	<b>MX</b> <b>LV429384</b> <b>LV429385</b> <b>LV429386</b> <b>LV429387</b> <b>LV429388</b> <b>LV429382</b> <b>LV429390</b> <b>LV429391</b> <b>LV429392</b> <b>LV429383</b> <b>LV429393</b> <b>LV429394</b>	<b>MN</b> <b>LV429404</b> <b>LV429405</b> <b>LV429406</b> <b>LV429407</b> <b>LV429408</b> <b>LV429402</b> <b>LV429410</b> <b>LV429411</b> <b>LV429412</b> <b>LV429403</b> <b>LV429413</b> <b>LV429414</b>
<b>MN 48 V 50/60 Hz with fixed time delay</b>				
		Composed of:	MN 48 V DC Delay unit 48 V 50/60 Hz	<b>LV429412</b> <b>LV429426</b>
<b>MN 220-240 V 50/60 Hz with fixed time delay</b>				
		Composed of:	MN 250 V DC Delay unit 220-240 V 50/60 Hz	<b>LV429414</b> <b>LV429427</b>


# Accessories

## EasyPact and Vigi

### CVS100/160/250

#### Rotary handles

##### Direct rotary handle




With black handle

LV429337

DB412259

##### Extended rotary handle




With black handle

LV429338

DB412260

#### Locks


##### Toggle locking device for 1 to 3 padlocks



By removable device

29370

DB40164



By fixed device

29371

DB40165

##### Locking of rotary handle



Keylock adaptor (keylock not included)  
Keylock (keylock adaptor not included)

Ronis 1351B.500  
Profalux KS5 B24 D4Z

LV429344  
41940  
42888

DB412263

#### Interlocking

Mechanical interlocking for circuit breakers	
DB111486 	With toggles 29354
DB111487 	With rotary handles LV429369

#### Interlocking with key (2 keylocks / 1 key) for rotary handles

E26706 	Keylock kit (keylock not included) (1) 1 set of 2 keylocks (1 key only, keylock kit not included)	Ronis 1351B.500 Profalux KS5 B24 D4Z	LV429344 41950 42878
------------	---	---	----------------------------

#### Installation accessories

Front-panel escutcheons	
E21641 	IP40 toggle escutcheon (small cut-out)
	IP40 escutcheon for Rotary handle
	IP40 escutcheon for Vigi module

IP40

#### Lead-sealing accessories

DB115615 	Bag of accessories	LV429375
--------------	--------------------	----------

#### Din rail adaptor

DB112739 	1 adaptor	LV429305
--------------	-----------	----------

#### Spare parts

E19824 	10 toggle extensions Bag of screws 12 snap-in nuts (fixed/FC) 1 set of 10 identification labels	M6 for CVS100B/F M8 for CVS160/250B/F	LV429313 LV429312 LV510100 LV516060 LV429226
------------	--	--	--

(1) For only 1 device.




<b>CVS400/630: complete fixed/FC device</b>	<b>E-16</b>
EasyPact and Vigi CVS400/630F/N	E-16
EasyPact CVS400/630N (36 kA 380/415 V)	E-18
EasyPact CVS400/630NA	E-19
<b>Add-on Vigi module: EasyPact and Vigi</b>	<b>E-20</b>
CVS400/630	E-20
<b>Accessories</b>	<b>E-21</b>
EasyPact and Vigi CVS400/630	E-21

## Catalogue numbers

# CVS400/630: complete fixed/FC device EasyPact and Vigi CVS400/630F/N

### EasyPact CVS400/630F

#### With TM-D thermal-magnetic trip unit




DB400008

#### EasyPact CVS400F (36 kA at 380/415 V)

Rating	3P 3d	4P 3d	4P 4d
TM320D	LV540305	LV540308	LV540311
TM400D	LV540306	LV540309	LV540312
<b>EasyPact CVS630N (36 kA at 380/415 V)</b>			
Rating	3P 3d	4P 3d	4P 4d
TM500D	LV563305	LV563308	LV563311
TM600D	LV563306	LV563309	LV563312

### EasyPact CVS400/630N

#### With TM-D thermal-magnetic trip unit




DB400008

#### EasyPact CVS400F (50 kA at 380/415 V)

Rating	3P 3d	4P 3d	4P 4d
TM320D	LV540315	LV540318	LV540321
TM400D	LV540316	LV540319	LV540322
<b>EasyPact CVS630F (50 kA at 380/415 V)</b>			
Rating	3P 3d	4P 3d	4P 4d
TM500D	LV563315	LV563318	LV563321
TM600D	LV563316	LV563319	LV563322

### Vigi add-on module CVS400/630F

#### With TM-D thermal-magnetic trip unit




DB400016

#### Vigi CVS400F (36 kA at 380/415 V)

Rating	3P 3d	4P 3d	4P 4d
TM320D	LV540335	LV540338	LV540341
TM400D	LV540336	LV540339	LV540342
<b>Vigi CVS400N (36 kA at 380/415 V)</b>			
Rating	3P 3d	4P 3d	4P 4d
TM500D	LV563335	LV563338	LV563341
TM600D	LV563336	LV563339	LV563342

### Vigi add-on module CVS400/630N

#### With TM-D thermal-magnetic trip unit



DB400016


#### Vigi CVS400N (50 kA at 380/415 V)

Rating	3P 3d	4P 3d	4P 4d
TM320D	LV540345	LV540348	LV540351
TM400D	LV540346	LV540349	LV540352
<b>Vigi CVS630N (50 kA at 380/415 V)</b>			
Rating	3P 3d	4P 3d	4P 4d
TM500D	LV563345	LV563348	LV563351
TM600D	LV563346	LV563349	LV563352

# CVS400/630: complete fixed/FC device EasyPact and Vigi CVS400/630F/N

## EasyPact CVS400/630F

With MA magnetic trip unit



DB40020

### EasyPact CVS400F (36 kA at 380/415 V)

Rating	3P 3D
MA320	LV540550

### EasyPact CVS400N (50 kA at 380/415 V)

Rating	3P 3D
MA320	LV540552

### EasyPact CVS630F (36 kA at 380/415 V)





Rating	3P 3D
MA500	LV563550

### EasyPact CVS630N (50 kA at 380/415 V)

Rating	3P 3D
MA500	LV563552

## Catalogue numbers


# CVS400/630: complete fixed/FC device EasyPact CVS400/630N (36 kA 380/415 V)

EasyPact CVS400/630F			
ETS 2.3 electronic trip unit (LS0I protection)			
DB400021		EasyPact CVS400F (36 kA at 380/415 V) EasyPact CVS630F (36 kA at 380/415 V)	400 A 630 A
		3P 3d <b>LV540505</b>	4P 3d, 4d, 3d + N/2 <b>LV540506</b>
EasyPact CVS400/630N			
DB400021		EasyPact CVS400N (50 kA at 380/415 V) EasyPact CVS630N (50 kA at 380/415 V)	400 A 630 A
		3P 3d <b>LV540510</b>	4P 3d, 4d, 3d + N/2 <b>LV540511</b>
Vigi add-on module CVS400/630F			
DB400022		Vigi CVS400F (36 kA at 380/415 V) Vigi CVS630F (36 kA at 380/415 V)	400 A 630 A
		3P 3d <b>LV540520</b>	4P 3d, 4d, 3d + N/2 <b>LV540521</b>
Vigi add-on module CVS400/630N			
DB400022		Vigi CVS400N (50 kA at 380/415 V) Vigi CVS630N (50 kA at 380/415 V)	400 A 630 A
		3P 3d <b>LV540524</b>	4P 3d, 4d, 3d + N/2 <b>LV540525</b>

# CVS400/630: complete fixed/FC device EasyPact CVS400/630NA

## EasyPact CVS400/630 NA switch-disconnector

DB40023




EasyPact CVS400 NA  
EasyPact CVS600 NA, 45 mm pitch

**3P**  
**LV540400**  
**LV563400**

**4P**  
**LV540401**  
**LV563401**

## Vigi CVS400/630 NA switch-disconnector

DB40024




Vigi CVS400 NA  
Vigi CVS600 NA, 45 mm pitch

**3P**  
**LV540402**  
**LV563402**

**4P**  
**LV540403**  
**LV563403**

+ Vigi module or insulation monitoring module

Vigi module



Type MB	200 to 440 V	3P LV432455	4P LV432456
---------	--------------	----------------	----------------

# Accessories

## EasyPact and Vigi CVS400/630

Connection accessories (Cu or Al)					
<b>Rear connections</b>					
DB11225		2 short 2 long		LV432475 LV432476	
E22040		Aluminium connector 1x (35 to 300 mm²)	Set of 3 Set of 4	LV432479 LV432480	
E2041		Aluminium connector 2x (35 to 240 mm²)	Set of 3 Set of 4	LV432481 LV432482	
		Voltage plug for aluminium connector 1 or 2 cables	Set of 10	LV429348	
<b>Terminal extension <sup>(1)</sup></b>					
E21276		Right-angle terminal extension	Set of 3 Set of 4	LV432484 LV432485	
E21012		Edgewise terminal extensions	Set of 3 Set of 4	LV432486 LV432487	
		Spreaders	52.5 mm 70 mm	3P 4P 3P 4P	LV432490 LV432491 LV432492 LV432493
<b>Crimp lugs for copper cable <sup>(1)</sup></b>					
E18602		For cable 240 mm²	Set of 3 Set of 4	LV432500 LV432501	
		For cable 300 mm²	Set of 3 Set of 4	LV432502 LV432503	
Supplied with 2 (or 3) interphase barriers					
<b>Crimp lugs for aluminium cable <sup>(1)</sup></b>					
E30908		For cable 240 mm²	Set of 3 Set of 4	LV432504 LV432505	
		For cable 300 mm²	Set of 3 Set of 4	LV432506 LV432507	
Supplied with 2 (or 3) interphase barriers					
<b>Insulation accessories</b>					
E18618		Short terminal shield, 45 mm (1 piece)	3P 4P	LV432591 LV432592	
E18606		Long terminal shield, 45 mm (1 piece)	3P 4P	LV432593 LV432594	
		Interphase barriers	Set of 6	LV432570	
		2 insulating screens (70 mm pitch)	52,5 mm 70 mm	3P 4P 3P 4P	LV432595 LV432596 LV432578 LV432579

<sup>(1)</sup> supplied with 2 or 3 interphase barriers

<b>Electrical auxiliaries</b>					
<b>Auxiliary contacts (changeover)</b>					
E 18608		OF or SD or SDE or SDV OF or SD or SDE or SDV low level SDE adaptor mandatory for trip unit TM, MA and ETS2.3	29450 29452 LV540050		
<b>Voltage releases</b>					
E 18609		AC	Voltage 24 V 50/60 Hz 48 V 50/60 Hz 110-130 V 50/60 Hz 220-240 V 50/60 Hz and 208-277 V 60 Hz 380-415 V 50 Hz and 440-480 V 60 Hz	MX LV429384 LV429385 LV429386 LV429387 LV429388	MN LV429404 LV429405 LV429406 LV429407 LV429408
		DC	Voltage 12 V 24 V 30 V 48 V 60 V 125 V 250 V	LV429382 LV429390 LV429391 LV429392 LV429383 LV429393 LV429394	LV429402 LV429410 LV429411 LV429412 LV429403 LV429413 LV429414
<b>MN 48 V 50/60 Hz with fixed time delay</b>					
		Composed of:	MN 48 V DC Delay unit 48 V 50/60 Hz		LV429412 LV429426
<b>MN 220-240 V 50/60 Hz with fixed time delay</b>					
		Composed of:	MN 250 V DC Delay unit 220-240 V 50/60 Hz		LV429414 LV429427


# Accessories

## EasyPact and Vigi

### CVS400/630

#### Rotary handle

##### Direct rotary handle




Standard black handle

LV432597

E-18611

##### Extended rotary handle




Standard extended rotary handle

LV432598

E-18612

#### Locks

##### Toggle locking device for 1 to 3 padlocks



By removable device

29370

E-18621



By fixed device

32631

E-18613

##### Locking of the rotary handle



Keylock adaptor (keylock not included)

Ronis 1351B.500

LV432604

Keylock (keylock adaptor not included)

Profalux KS5 B24 D4Z

41940



42888

E-18620




#### Interlocking

##### Mechanical interlocking for circuit breakers

E21288		With toggles	32614
E16780		With rotary handles	LV432621

##### Interlocking with key (2 keylocks/1 key) for rotary handles

E26786		Keylock kit (keylock not included) <sup>(1)</sup> 1 set of 2 keylocks (1 key only, keylock kit not included)	LV432604 Ronis 1351B.500 Profalux KS5 B24 D4Z
<sup>(1)</sup> for only 1 device			

#### Installation accessories

##### Front-panel escutcheons

E21641		IP40 Toggle escutcheon (small cut-out) IP40 escutcheon for rotary handle IP40 escutcheon for Vigi module	32556 LV432558 LV429316
--------	--	--	-------------------------------

##### Lead-sealing accessories

		LV429375
--	--	----------

#### Spare parts

##### Front-panel escutcheons

	Toggle extension Bag of screws 1 set of 10 identification labels	LV432553 LV432552 LV429226
--	--	----------------------------------

#### Test

##### Test kits

E21590		Mini test kit for STR trip units	43362
E36271		Portable test kit for STR trip units Spare test plug for portable test kit 34547 Wiring kit (spare part)	34547 34503 34546

## Notes

---

## Notes

---



Schneider Electric Industries SAS  
35, rue Joseph Monier  
CS 30323  
F-92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439  
Capital social 896 313 776  
[www.schneider-electric.com](http://www.schneider-electric.com)

As standards, specifications and designs change from time to time, please ask for confirmation of the information given in this publication.



This document has been printed on ecological paper

Design: Schneider Electric  
Photos: Schneider Electric  
Printed: